


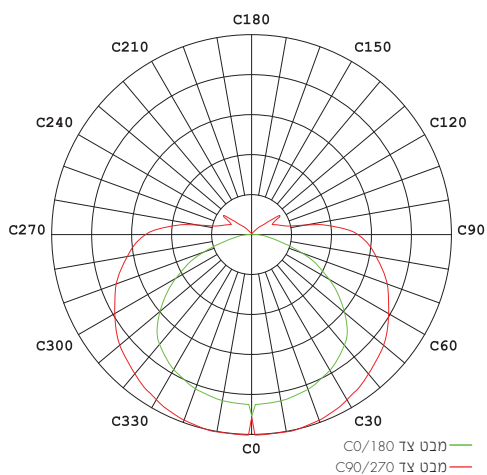

גופים לינאריים ביעילות אורית גבוהה 125lm/W וחוזק מכני IK08. חיסכון אנרגטי של כ- 70% בהשוואה לגופי תאורה מסורתיים. התקנה קלה ונוחה בגב הגוף באמצעות מודול לד נשלף ואפשרות לשרשר בין גופים. להארה באמבטיות, תאורה במעברים, מסדרונות, חדרי שירות ותאורה כללית.

מק"ס - 10541233

דגם - 4058075122161

קישור לדף מוצר ואביזרים נלווים באתר



5Years
Guarantee



PRO

220-240V
50-60Hz



IP20

IK08

מתאים לדרשות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	62mm
Length	1168mm
Height	74mm
Product weight	1260g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	metal
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC
Lens material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	33W
Nominal current	0.15A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	280mA
Dimmable driver mode	No
Power factor	>0.92
THDi	<16%
Inrush current	20A
Inrush current time T_{h50}	100μs
Max. no. of lum. On circuit break. B16 A	41
Max. no. of lum. On circuit break. C10 A	33
Max. no. of lum. On circuit break. C16 A	53

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP20
Protection class IK (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted
Type of protection	IP20
Ambient temperature range	-10...+40°C

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>55000Hrs
Lifespan L80	>36000Hrs
Lifespan L90	>19000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	121Lm/W
Luminous flux	4000Lm
CCT	4000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	110°
CIE class	Semi-Direct
Efficiency	100%