




פס תאורת לד ליניארי במידות קומפקטיות. נצילות ושטף אור גבוהים במיוחד. יעילות אורית של 100Lm/W, התקנה קלה ונוחה. להארת מסדרונות ומבואות, תאורה נסתרת, תאורת מדפים, ארונות ואווירה.

מק"ט - 10583608  
קישור לדף מוצר ואביזרים נלווים באתר

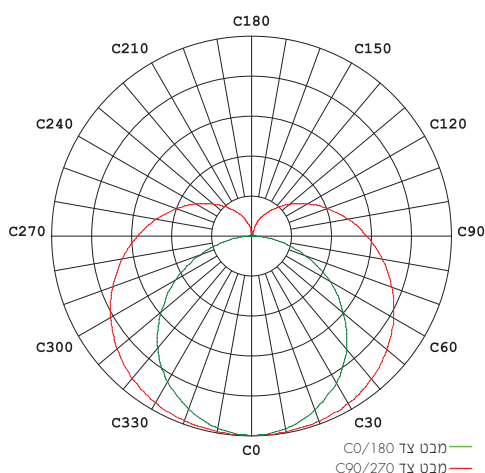

3Years Guarantee | VALUE | 220-240V 50-60Hz | IP20 | IK02 | מתאים לדרשות התקן הישראלי



## DIMENSIONS & WEIGHT

## מידות ומשקל

|                |       |
|----------------|-------|
| Width          | 28mm  |
| Length         | 313mm |
| Height         | 36mm  |
| Product weight | 300g  |

## MATERIALS & COLORS

## מבנה וגימור

|                            |       |
|----------------------------|-------|
| Product color              | white |
| Body material              | PC    |
| Protection class IEC 62262 | IK02  |
| Cover finishing            | milky |
| Cover material             | PC    |
| Lens material              | PC    |



ELECTRICAL DATA

נתונים חשמליים

|                       |                     |
|-----------------------|---------------------|
| Nominal wattage       | 8W                  |
| Nominal current       | 0.07A               |
| Nominal voltage       | 220-240V            |
| Mains frequency       | 50/60Hz             |
| Protection class      | Class 2             |
| Operating mode        | Internal LED driver |
| Driver manufacturer   | Integrated          |
| Driver output current | 100mA               |
| Dimmable driver mode  | No                  |
| Power factor          | >0.50               |

CERTIFICATES & STANDARDS

תקנים

|                                        |                                                                                         |
|----------------------------------------|-----------------------------------------------------------------------------------------|
| Nisko Class                            | VALUE 3 Years                                                                           |
| Israeli Standard                       | Ta=25°C<br>IS 20-1<br>IS 20-2-1                                                         |
| CB                                     | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety                 | IEC 62471 RG0 (Exempt)<br>IEC 62778 RG0 (Exempt)                                        |
| EMC                                    | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547                                |
| LM80                                   | √                                                                                       |
| IP 60529                               | IP20                                                                                    |
| Protection class IK (shock resistance) | IK02                                                                                    |
| Green Building                         | ISO 14001                                                                               |
| ISO 9001                               | √                                                                                       |

APPLICATION & MOUNTING

יישומים

|                           |                      |
|---------------------------|----------------------|
| Application environment   | INDOOR               |
| Mounting type             | Surface              |
| Mounting location         | Ceiling/Wall-mounted |
| Type of protection        | IP20                 |
| Ambient temperature range | -20...+40°C          |

PERFORMANCE

ביצועים

|               |           |
|---------------|-----------|
| Lifespan (Hr) | 30000Hrs  |
| Lifespan L70  | >50000Hrs |
| Lifespan L80  | >40000Hrs |
| Lifespan L90  | >30000Hrs |



PHOTOMETRIC DATA

אופטיקה

|                   |             |
|-------------------|-------------|
| Luminous efficacy | 100Lm/W     |
| Luminous flux     | 800Lm       |
| CCT               | 3000K       |
| CRI               | >80         |
| LED manufacturer  | Bridgelux   |
| Chip type         | SMD 2835    |
| Beam angle        | 140°        |
| CIE class         | Semi-Direct |
| Efficiency        | 100%        |