


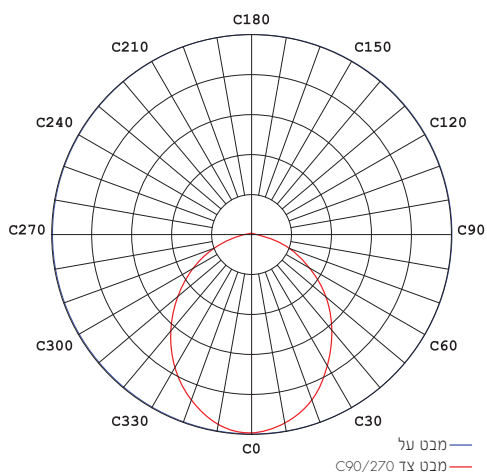

סדרת תאורת הצפה מהווים תחליף מלא לפנסי הצפה מטל הלייד עד 400W. חיסכון אנרגטי של כ- 50% בהשוואה לנורות מטל הלייד, וכך תורמים להחזר השקעה מהיר. עיצוב מושלם ונקי, משקל מינימלי ואחידות אורית גבוהה. משמש להתקנה כתאורת הצפה חיצונית או פנימית בחניות ומעברים, חניונים, שטחים ציבוריים ולהארת מבנים.


מק"ט - 10584165

דגם - 4058075423732

קישור לדף מוצר ואביזרים נלווים באתר



5Years Guarantee | PRO | 100-277V 50-60Hz | IP65 | IK08



DIMENSIONS & WEIGHT

מידות ומשקל

Width	322mm
Length	418mm
Height	60mm
Product weight	4800g

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Frosted
Cover material	glass

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	165W
Nominal current	0.8A
Nominal voltage	100-277V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	920mA
Dimmable driver mode	No
Power factor	>0.90
THDi	<20%
Inrush current	80A
Inrush current time T_{h50}	1000μs
Max. no. of lum. On circuit break. B16 A	3
Max. no. of lum. On circuit break. C10 A	5
Max. no. of lum. On circuit break. C16 A	8

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface Pole
Mounting location	Ceiling/Wall-mounted Pole
Type of protection	IP65
Ambient temperature range	-30...+50°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=50°C IS 20-1 IS 20-2-5
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
Protection class IK (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	70000Hrs
Lifespan L70	>70000Hrs
Lifespan L80	>55000Hrs
Lifespan L90	>35000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	121Lm/W
Luminous flux	20000Lm
CCT	4000K
CRI	>80
LED manufacturer	LUMILEDS
Chip type	SMD 2835
Beam angle	100X100°
IES Classification	Type VS
Longitudinal Classification	Very Short
BUG Rating	B4-U2-G2
Efficiency	100%