


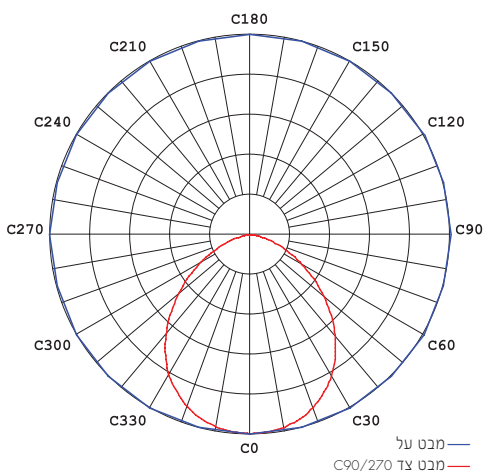

פנס הצפה לד בעיצוב נקי ובמשקל מינימלי. מהווה תחליף מלא לפנס הצפה הלוגן 400W ומבטיח חיסכון אנרגטי של כ- 90% בהשוואה לנורות הלוגן. בעל אחידות אורית גבוהה. משמש להארה בחניות ומעברים, חניונים, שטחים ציבוריים והארת מבנים.


מק"ט - 10585130

דגם - 4058075421240

קישור לדף מוצר ואביזרים נלווים באתר



3Years Guarantee | VALUE | 220-240V 50-60Hz | IP65 | IK06

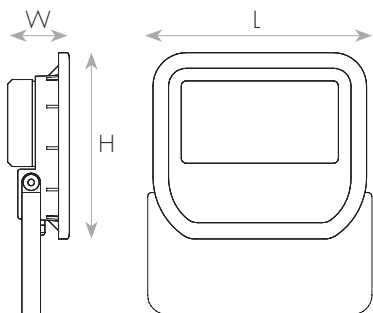

DIMENSIONS & WEIGHT

מידות ומשקל

Width	206mm
Length	218mm
Height	46mm
Product weight	1000g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK07
Cover finishing	Clear
Cover material	glass

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	50W
Nominal current	0.24A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	460mA
Dimmable driver mode	No
Power factor	>0.90
THDi	<20%
Inrush current	9.9A
Inrush current time T _{h50}	51µs
Max. no. of lum. On circuit break. B16 A	38
Max. no. of lum. On circuit break. C10 A	28
Max. no. of lum. On circuit break. C16 A	44

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted Pole
Type of protection	IP65
Ambient temperature range	-30...+50°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
TM21	√ Ta=25°C
Binning	SDCM ≤ 5
IP 60529	IP65
Protection class IK (shock resistance)	IK07
Green Building	ISO 14001
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	30000Hrs
TM21	√ Ta=25°C
Lifespan L70	>70000Hrs
Lifespan L80	>55000Hrs
Lifespan L90	>35000Hrs



PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	110Lm/W
Luminous flux	5500Lm
CCT	3000K
CRI	>80
SDCM	≤5
Beam angle	100X100°
IES Classification	Type VS
Longitudinal Classification	Very Short
Efficiency	100%