


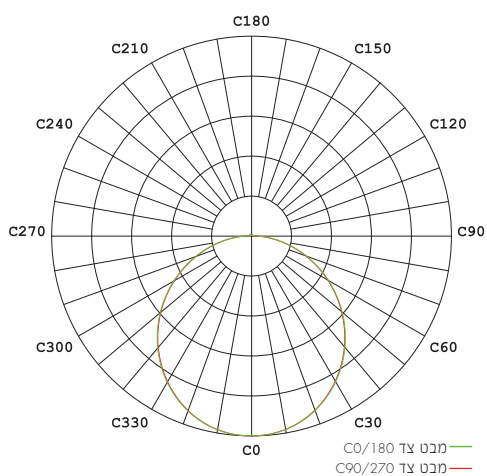

צמוד תקרה איכותי בדרגת אטימות IP65. התקנה קלה ונוחה בקליק, איכות אורית גבוהה, בעל הילת אור על התקרה. ייעודי להתקנה בכל סוגי החללים - פנים וחיצון כאחד. להארה בבתים, מוסדות, בתי מלון ועוד.

מק"ט - 17700012

דגם - EW-X09-40W-White-CCT3

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee



VALUE

220-240V
50-60Hz




IP65



IK08

מתאים לרשימת
התקן הישראלי

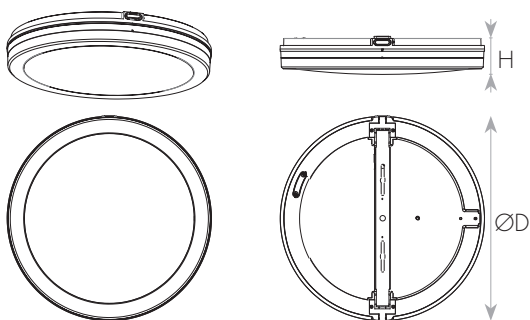

DIMENSIONS & WEIGHT

מידות ומשקל

Height	55mm
Diameter	400mm
Product weight	1050g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	ABS
Cover finishing	milky
Cover material	PP
Lens material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	43W
Nominal current	0.7A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No
Power factor	0.9

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted
Type of protection	IP65
Ambient temperature range	-12...+45°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 62031
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65

PERFORMANCE

ביצועים

Lifespan (Hr)	30000Hrs
---------------	----------



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	103Lm/W
Luminous flux	3950/4450/4300Lm
CCT	3000/4000/6500K
CRI	>80
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%