


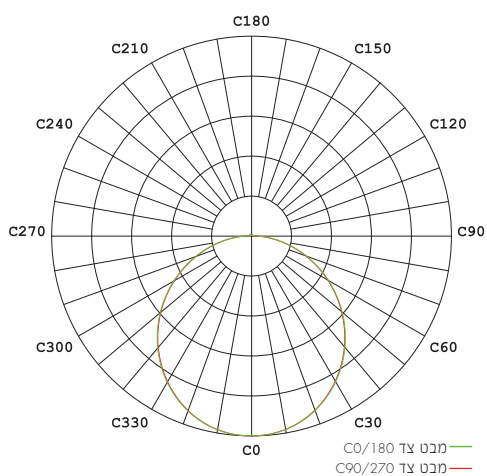

צמוד תקרה איכותי בדרגת אטימות IP65. התקנה קלה ונוחה בקליק, איכות אורית גבוהה, בעל הילת אור על התקרה. ייעודי להתקנה בכל סוגי החללים - פנים וחצר כאחד. עבור בתים, מוסדות, בתי מלון ועוד.

מק"ט - 17700019

דגם - XF-XX500SUR70BL

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee



VALUE

220-240V
50-60Hz




IP65



IK08

מתאים לרשימת
התקן הישראלי

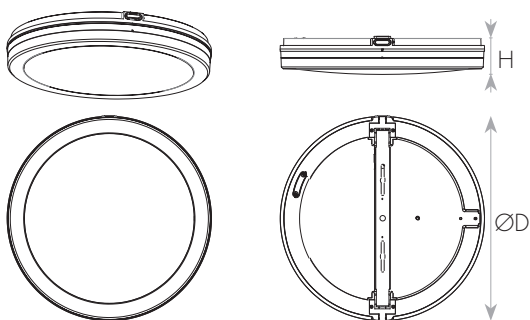

DIMENSIONS & WEIGHT

מידות ומשקל

Height	57mm
Diameter	500mm

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	ABS
Cover finishing	milky
Cover material	PC
Lens material	PMMA



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	70W
Nominal current	0.3A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted
Type of protection	IP65
Ambient temperature range	-12...+45°C

PERFORMANCE

ביצועים

Lifespan (Hr)	25000Hrs
---------------	----------

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	106Lm/W
Luminous flux	7000/7400/7150Lm
CCT	3000/4000/6500K
CRI	>80
LED manufacturer	LVMING
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%