
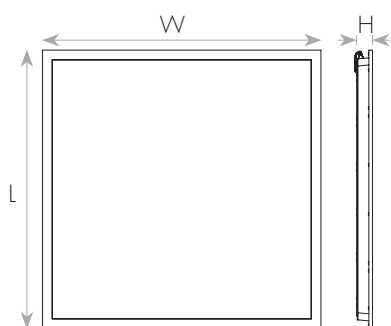
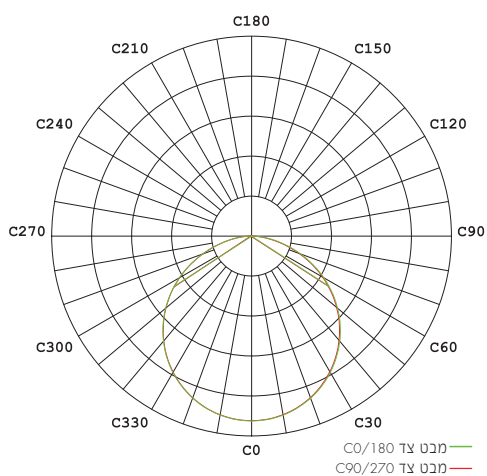


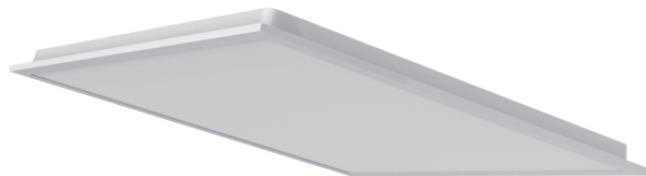

סדרת פאנל לד שקוע בדרגת אטימות IP40. דרייבר חיצוני ללא ריצוד
FLICKER FREE ויעילות אורית גבוהה של עד 100Lm/W, עדשת
PMMA וחיסכון של כ-70% בצריכת החשמל. מתאים להתקנה שקועה
בתקרה אקוסטית, אינצ'ית או מילימטרית. להארה במשרדים, בתי ספר,
מוסדות ועוד.

מק"ט - 17840207

דגם - CH3335 6060

קישור לדף מוצר ואביזרים נלווים באתר



2Years
Guarantee



VALUE

220-240V
50-60Hz



IP40



IK04

מתאים לדרשות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	595mm
Length	595mm
Height	34mm
Product weight	2000g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK04
Cover finishing	milky
Cover material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	40W
Nominal current	0.18A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	NISKO
Driver model	CHD3311A-A38
Driver output current	800mA
Dimmable driver mode	No
Power factor	>0.96
THDi	<10%
Optional driver ON/OFF	LF 17900109 LDV 10025040
Optional driver 1-10V	LF 17900214 LF 17900218
Optional driver DALI	LF 17900253

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	-20...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP40
Protection class IK (shock resistance)	IK04
Green Building	ISO 14001
ISO 9001	√
אישורים נוספים	פיקוד העורף √ מבחן הרס ת"י 5103-4 √

PERFORMANCE

ביצועים

Lifespan (Hr)	30000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	99Lm/W
Luminous flux	3950Lm
CCT	3000K
CRI	>80
LED manufacturer	SAMSUNG
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%