





פאנל לד שקוע להתקנה שטוחה בקו אפס עם תקרות אקוסטיות ותקרות גבס. פריזמה אקרילית המסננת UV וכולל תאורת לד צידית SIDELIGHT, המייצרת שטיפת אור אחידה. פתח קדח ייחודי 580X580 מ"מ. להארה במשרדים, בתי ספר, מוסדות ועוד.

מק"ט - 17840213
דגם - XSD-PS14-40D-3K
קישור לדף מוצר ואביזרים נלווים באתר

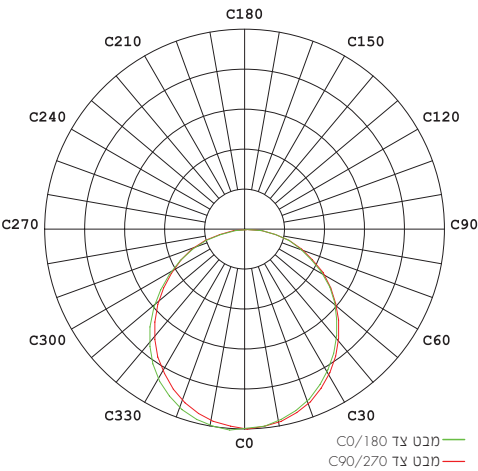

3Years Guarantee | VALUE | 220-240V 50-60Hz | IP3X | IK04 | מתאים לדרשות התקן הישראלי

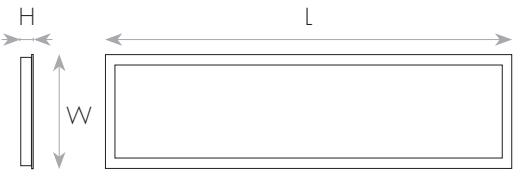

DIMENSIONS & WEIGHT

מידות ומשקל

Width	295mm
Length	1195mm
Height	9mm
Product weight	5500g
Cut hole	285X1185mm

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK04
Cover finishing	milky
Cover material	Acrylic Prismatic



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	40W
Nominal current	0.18A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF040YS1000H
Driver output current	1000mA
Dimmable driver mode	No
Power factor	>0.95
THDi	<20%
Output ripple current	≤1%
Inrush current	27A
Inrush current time T _{h50}	154μs
Max. no. of lum. On circuit break. B10 A	20
Max. no. of lum. On circuit break. B16 A	34
Max. no. of lum. On circuit break. C10 A	33
Max. no. of lum. On circuit break. C16 A	56
Optional driver ON/OFF	LF 17900110 LDV 10025040
Optional driver 1-10V	LF 17900210 LF 17900218
Optional driver DALI	LF 17900253 LF 17900254

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP3X
Protection class IK (shock resistance)	IK04
ISO 9001	√



APPLICATION & MOUNTING	יישומים
Application environment	INDOOR
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP3X
Ambient temperature range	-4...+50°C

PERFORMANCE	ביצועים
Lifespan (Hr)	45000Hrs
Driver lifespan	45000Hrs

PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	100Lm/W
Luminous flux	4000Lm
CCT	3000K
CRI	>85
LED manufacturer	JF
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%