





סדרת פאנל לד שקוע תקרה מעוצב ומקצועי בדרגת אטימות IP65. תאורת לד צדית SIDELIGHT ודרייבר מונע ריצוד FLICKER FREE. יעילות אורית מיטבית. להתקנה שקועה בתקרה אקוסטית, אינצ'ית או מילימטרית. להארת משרדים, בתי ספר, מוסדות, מעבדות, מטבחים תעשייתיים, מלתחות ועוד.

מק"ט - 17840310
דגם - WQRPL-30120
קישור לדף מוצר ואביזרים נלווים באתר

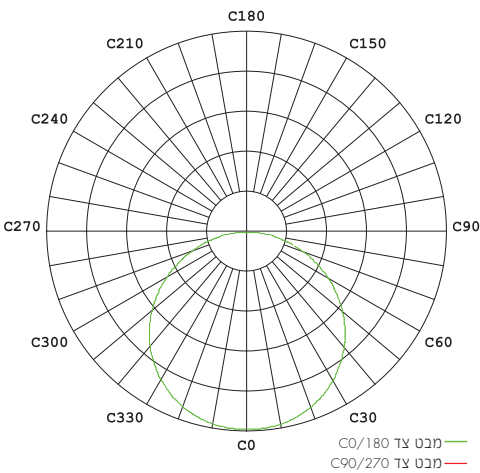

5Years Guarantee | PRO | 220-240V 50-60Hz | IP65 | IK06 | מתאים לרשימות התקן הישראלי

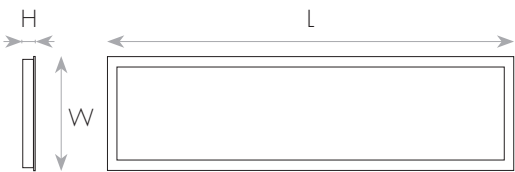

DIMENSIONS & WEIGHT

מידות ומשקל

Width	295mm
Length	1195mm
Height	11mm
Product weight	4500g
Cut hole	1180X280mm

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK06
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	40W
Nominal current	0.18A
Nominal voltage	200-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF040YA(H)1050H
Driver output current	1050mA
Dimmable driver mode	No
Power factor	>0.95
THDi	<20%
Output ripple current	≤0.5%
Inrush current	60A
Inrush current time T_{h50}	350μs
Max. no. of lum. On circuit break. B10 A	12
Max. no. of lum. On circuit break. B16 A	20
Max. no. of lum. On circuit break. C10 A	20
Max. no. of lum. On circuit break. C16 A	34
Optional driver ON/OFF	LF 17900112 LDV 10025040
Optional driver 1-10V	LF 17900210 LF 17900218
Optional driver DALI	LF 17900253

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62471 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP65
Protection class IK (shock resistance)	IK06
אישורים נוספים	פיקוד העורף ✓ מבחן הרס ת"י 5103-4 ✓



APPLICATION & MOUNTING	יישומים
Application environment	INDOOR
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE	ביצועים
Lifespan (Hr)	120000Hrs
Driver lifespan	120000Hrs

PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	89Lm/W
Luminous flux	3550Lm
CCT	4200K
CRI	>80
LED manufacturer	BMTC
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%