
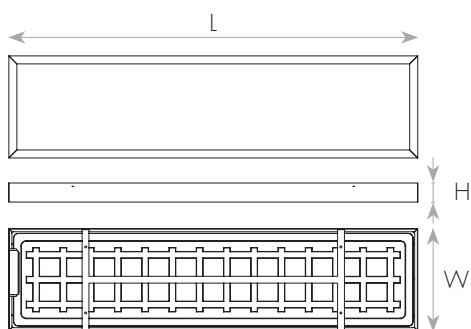
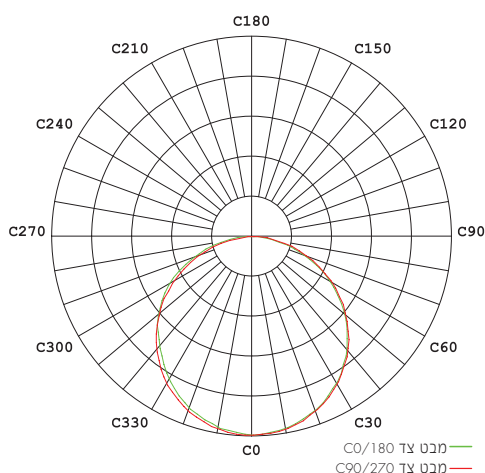


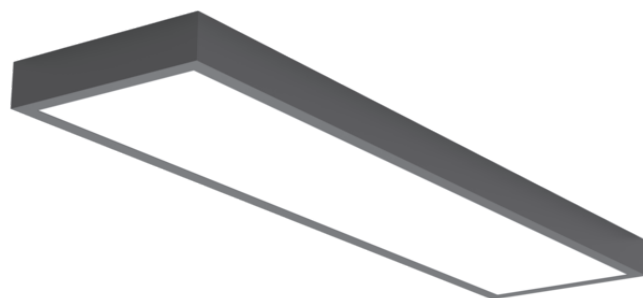

פאנל לד על הטיח ביעילות אורית גבוהה 100Lm/W. כיסוי אופטי חלבי המאפשר שטף אור גבוה ביותר. דרייבר מונע ריצוד. מסגרת ברזל דקורטיבית. להארה בבתים פרטיים, במטבח, סלון וחדרי שינה.

מק"ט - 17840323

דגם - BLP100-48W

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee



VALUE

220-240V
50-60Hz



IP3X



מתאים לדרגות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	300mm
Length	12000mm
Height	56mm
Product weight	2500g

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	iron
Protection class IEC 62262	IK02
Cover finishing	milky
Cover material	PS
Lens material	PMMA



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	48W
Nominal current	0.21A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver manufacturer	XZ-POWER
Driver model	XZ-QA40B-420105-A-W
Driver output current	1050mA
Dimmable driver mode	No
Power factor	>0.98
THDi	<9%
Optional driver ON/OFF	LF 17900112 LDV 10025040
Optional driver 1-10V	LF 17900218
Optional driver DALI	LF 17900253

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP3X
Ambient temperature range	-15...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
CE	√
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP3X
Protection class IK (shock resistance)	IK02
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	35000Hrs
---------------	----------



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	100Lm/W
Luminous flux	4800Lm
CCT	6500K
CRI	>85
LED manufacturer	Jiangsu Prajna Electronic
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%