



סדרת גופי תאורת לד הרמטיים ביעילות אורית של כ- 100Lm/W ודרגת אטימות IP65. התקנה נוחה ומהירה, ללא צורך בפתיחת הגוף. להארת מרפסות, פרגולות, סוכות, מחסנים ביתיים ועוד.

מק"ט - 70337660

דגם - OLD-01-1260-F

קישור לדף מוצר ואביזרים נלווים באתר




3Years
Guarantee

175-240V
50-60Hz



IP65

מתאים לרשימת
התקן הישראלי

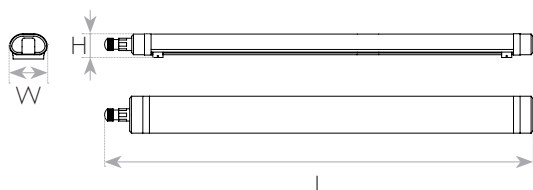

DIMENSIONS & WEIGHT

מידות ומשקל

Width	85mm
Length	1240mm
Height	50mm
Product weight	486g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	PC
Cover finishing	milky
Cover material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	60W
Nominal current	0.26A
Nominal voltage	175-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
CE	IEC 60598-1 IEC 60598-2-1
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted
Type of protection	IP65
Ambient temperature range	0...+35°C

PERFORMANCE

ביצועים

Lifespan (Hr)	36000Hrs
---------------	----------

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	86Lm/W
Luminous flux	5150Lm
CCT	6000K
CRI	>80
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%