




סדרת גופי תאורת מראה בעיצוב יוקרתי ובדרגת אטימות IP44. שלושה גוני אור לבחירה. להתקנה נוחה ומהירה בחדרי אמבטיה, מעל המראות ועוד.

מק"ט - 70338001  
דגם - LWA1034-610A 17W White  
קישור לדף מוצר ואביזרים נלווים באתר



3Years Guarantee | VALUE | 220-240V 50-60Hz | IP44 | מתאים לרשימת התקן הישראלי

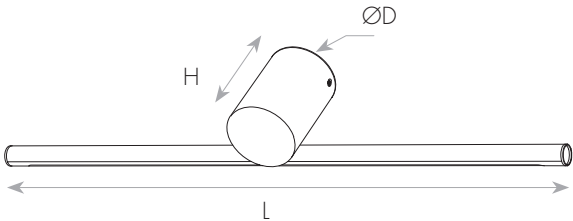

| DIMENSIONS & WEIGHT | מידות ומשקל |
|---------------------|-------------|
| Width               | 100mm       |
| Length              | 610mm       |
| Diameter            | 70mm        |
| Product weight      | 550g        |

| MATERIALS & COLORS | מבנה וגימור |
|--------------------|-------------|
| Product color      | white       |
| Body material      | aluminum    |
| Cover finishing    | milky       |
| Cover material     | PC          |



ELECTRICAL DATA

נתונים חשמליים

|                       |                     |
|-----------------------|---------------------|
| Nominal wattage       | 17W                 |
| Nominal current       | 0.12A               |
| Nominal voltage       | 220-240V            |
| Mains frequency       | 50/60Hz             |
| Protection class      | Class 1             |
| Operating mode        | Internal LED driver |
| Driver manufacturer   | XJIUP               |
| Driver model          | XC15W400C1          |
| Driver output current | 400mA               |
| Dimmable driver mode  | No                  |
| Power factor          | >0.56               |

CERTIFICATES & STANDARDS

תקנים

|                        |                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------|
| Nisko Class            | VALUE 3 Years                                                                           |
| Israeli Standard       | Ta=40°C<br>IS 20-1<br>IS 20-2-1                                                         |
| CE                     | IEC 60598-1<br>IEC 60598-2-5<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt)                                                                  |
| EMC                    | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547                                |
| LM80                   | √                                                                                       |
| IP 60529               | IP44                                                                                    |
| ISO 9001               | √                                                                                       |

APPLICATION & MOUNTING

יישומים

|                           |           |
|---------------------------|-----------|
| Application environment   | INDOOR    |
| Mounting type             | Surface   |
| Mounting location         | Wall      |
| Type of protection        | IP44      |
| Ambient temperature range | 0...+40°C |

PERFORMANCE

ביצועים

|               |          |
|---------------|----------|
| Lifespan (Hr) | 50000Hrs |
|---------------|----------|

PHOTOMETRIC DATA

אופטיקה

|                   |                 |
|-------------------|-----------------|
| Luminous efficacy | 68Lm/W          |
| Luminous flux     | 1150Lm          |
| CCT               | 3000/3500/4000K |
| CRI               | >80             |
| LED manufacturer  | EVERLIGHT       |
| Chip type         | SMD 2835        |
| Beam angle        | 130°            |
| Efficiency        | 100%            |