




סדרת גופי תאורת מראה בעיצוב יוקרתי ובדרגת אטימות IP44. כוללים לדים איכותיים מבית LUMILEDS ודרייבר מוביל מבית TRIDONIC. להתקנה נוחה ומהירה בחדרי אמבטיה, מעל המראות ועוד.

מק"ט - 70338016
דגם - 2279
קישור לדף מוצר ואביזרים נלווים באתר



5Years Guarantee | PRO | 220-240V 50-60Hz | IP44 | IK08 | מתאים לרשימת התקן הישראלי ✓

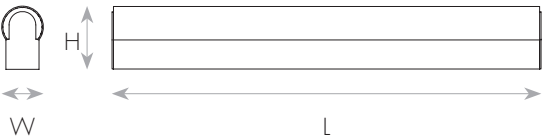

DIMENSIONS & WEIGHT

מידות ומשקל

Width	58mm
Length	605mm
Height	90mm
Product weight	1360g

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PMMA
Lens material	PMMA

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	11W
Nominal current	0.05A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	TRIDONIC
Driver model	LC 10/200-350/29 Flex Ip SNC4
Driver output current	200-350mA
Dimmable driver mode	No
Power factor	>0.92
THDi	<13%
Output ripple current	≤5%
Inrush current	16A
Inrush current time T _{h50}	110µs
Max. no. of lum. On circuit break. B10 A	42
Max. no. of lum. On circuit break. B16 A	68
Max. no. of lum. On circuit break. C10 A	70
Max. no. of lum. On circuit break. C16 A	113

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Wall-mounted
Type of protection	IP44
Ambient temperature range	-10...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP44
Protection class IK (shock resistance)	IK08

PERFORMANCE

ביצועים

Lifespan (Hr)	75000Hrs
Driver lifespan	75000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	86Lm/W
Luminous flux	950Lm
CCT	3000K
CRI	>90
LED manufacturer	LUMILEDS
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%