



גוף תאורה BOLLARD לד מעוצב, בדרגת אטימות IP54. פתרון מושלם לתאורת חוץ. כיסוי פוליקרבונט PC חלבי להתקנה בשטחים פתוחים: שבילים, גינות, גנים ציבוריים, מבואות מבנים, טיילות ועוד.

מק"ט - 70409514

דגם - ESPL-GL15602

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee




VALUE

220-240V
50-60Hz



IP54

מתאים לרשימות
התקן הישראלי

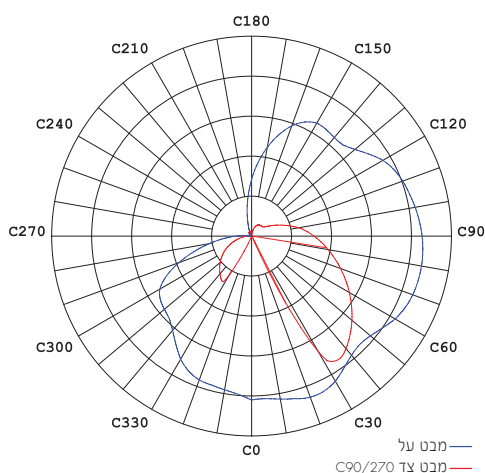

DIMENSIONS & WEIGHT

מידות ומשקל

Height	500mm
Diameter	90mm
Product weight	2800g

MATERIALS & COLORS

מבנה וגימור

Product color	dark gray
Body material	aluminum
Cover finishing	milky
Cover material	PC
Lens material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	9W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	ESPL
Driver model	DS8W0300
Driver output current	300mA
Dimmable driver mode	No

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting location	Ground
Type of protection	IP54
Ambient temperature range	0...+35°C

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
---------------	----------

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	44Lm/W
Luminous flux	400Lm
CCT	3000K
CRI	>83
LED manufacturer	OSRAM
Chip type	SMD 3030
Beam angle	270°
Efficiency	100%