



סדרת שקועי תקרה מתקדמים ומקצועיים בדרגת אטימות IP44. גוף DOWNLIGHT במראה עדין עם כיסוי אופטי ייחודי למניעת סנוור UGR<19. אפשרות בחירת גוון אור בלחיצת כפתור - אור חם, ניטרלי או קר בגוף אחד. דרייבר חיצוני LIFUD ללא ריצוד להתקנה קלה ואמינה. מיועד למגוון רחב של יישומים, הארת שטחים מסחריים, מבואות, מעברים, משרדים ועוד.

מק"ט - 71170124

דגם - Q-22-22WR

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee



VALUE

220-240V
50-60Hz



IP20




IP44



IK04

מתאים לרשימות
התקן הישראלי

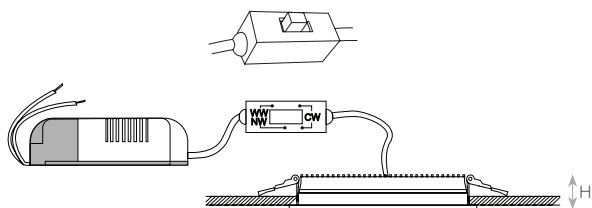

DIMENSIONS & WEIGHT

מידות ומשקל

Height	35mm
Diameter	170mm
Product weight	443g
Cut hole	158mm

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	aluminum
Protection class IEC 62262	IK04
Cover finishing	Anti Glare Crystal
Cover material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	22W
Nominal current	0.1A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF022YA0500H
Driver output current	500mA
Dimmable driver mode	No
Power factor	>0.97
THDi	<18%
Output ripple current	≤1%
Inrush current	60A
Inrush current time T _{h50}	350µs
Max. no. of lum. On circuit break. B10 A	53
Max. no. of lum. On circuit break. B16 A	85
Max. no. of lum. On circuit break. C10 A	88
Max. no. of lum. On circuit break. C16 A	144
Optional driver ON/OFF	LF 17900103 LDV 10025020
Optional driver 1-10V	LF 17900217
Optional driver DALI	LF 17900251 LF 17900252

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20/IP44
Protection class IK (shock resistance)	IK04
ISO 9001	√



APPLICATION & MOUNTING	יישומים	PERFORMANCE	ביצועים
Application environment	INDOOR	Lifespan (Hr)	50000Hrs
Mounting type	Recessed		
Mounting location	Ceiling		
Type of protection	IP20/IP44		
Ambient temperature range	-20...+35°C		
PHOTOMETRIC DATA	אופטיקה		
Luminous efficacy	95Lm/W		
Luminous flux	2100(4K)Lm		
CCT	2700/3000/4000K		
CRI	>80		
LED manufacturer	XuYu		
Chip type	SMD 2835		
Beam angle	120°		
CIE class	Direct		
UGR level	<19		
Efficiency	100%		