


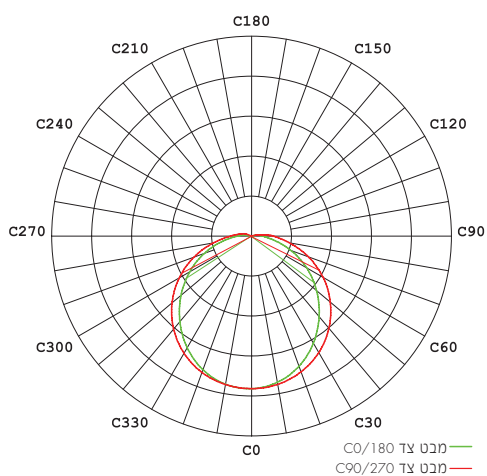

גוף תאורת לד ליניארי הרמטי IP65. יעילות אורית גבוהה במיוחד
110Lm/w. גוף הניתן לפתיחה ולהזנה מחלקו האחורי. סגירה
באמצעות תופסני נירוסטה ייעודיים. להתקנה בחניונים, מחסנים, מבני
תעשייה, מפעלים, מוסכים ועוד.

מק"ט - 71333340

דגם - LG07J-12-33

קישור לדף מוצר ואביזרים נלווים באתר



5Years Guarantee | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרשות התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	79mm
Length	1205mm
Height	68mm
Product weight	1350g

MATERIALS & COLORS

מבנה וגימור

Product color	gray
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	33W
Nominal current	0.15A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	240mA
Dimmable driver mode	No
Power factor	>0.97
THDi	<6%
Output ripple current	≤5%
Inrush current	24.6A
Inrush current time T _{h50}	204μs
Max. no. of lum. On circuit break. B10 A	67
Max. no. of lum. On circuit break. B16 A	83
Max. no. of lum. On circuit break. C10 A	70
Max. no. of lum. On circuit break. C16 A	112

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted
Type of protection	IP65
Ambient temperature range	-20...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	75000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>43000Hrs
Driver lifespan	75000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	120Lm/W
Luminous flux	3950Lm
CCT	4000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%