



סדרת גופי תאורת לד צמודי קיר בדרגת אטימות IP65. עיצוב דק, חדיש וקומפקטי. כולל שיטה ייחודית לבחירת גוון אור על ידי לחיצת כפתור. חסכוני בצריכת חשמל ותחזוקה. להתקנה על חומות, מעברים, כניסות לחניונים ועוד.

מק"ט - 71461238

דגם - 2006-2W WHITE

קישור לדף מוצר ואביזרים נלווים באתר



2Years
Guarantee






VALUE

220-240V
50-60Hz



IP65

מתאים לדרשות
התקן הישראלי

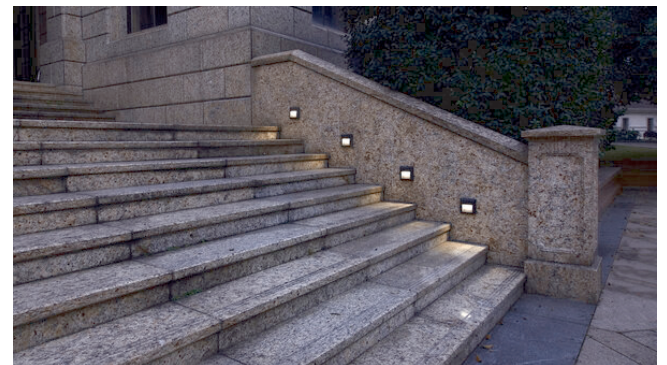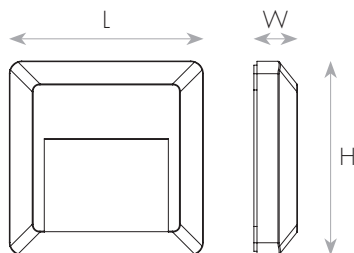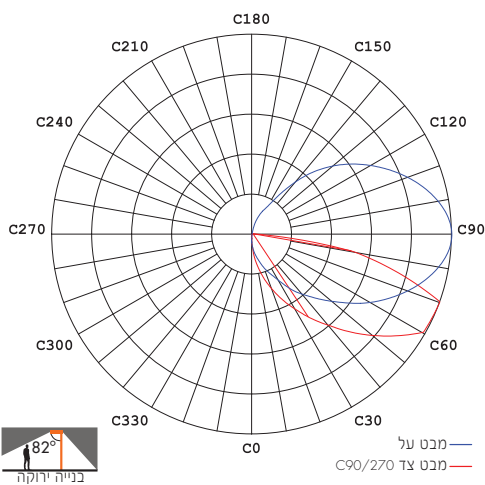

DIMENSIONS & WEIGHT

מידות ומשקל

Width	125mm
Length	28mm
Height	125mm
Product weight	200g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	PC
Cover finishing	milky
Cover material	PC



ELECTRICAL DATA	נתונים חשמליים
Nominal wattage	1.9W
Nominal current	0.01A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No

CERTIFICATES & STANDARDS	תקנים
Nisko Class	VALUE 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
ISO 9001	√

APPLICATION & MOUNTING	יישומים
Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE	ביצועים
Lifespan (Hr)	15000Hrs

PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	26Lm/W
Luminous flux	50/50/50Lm
CCT	3000/4000/6500K
CRI	>80
LED manufacturer	GLORY SKY
Chip type	SMD 2835
Beam angle	82°
Efficiency	100%