


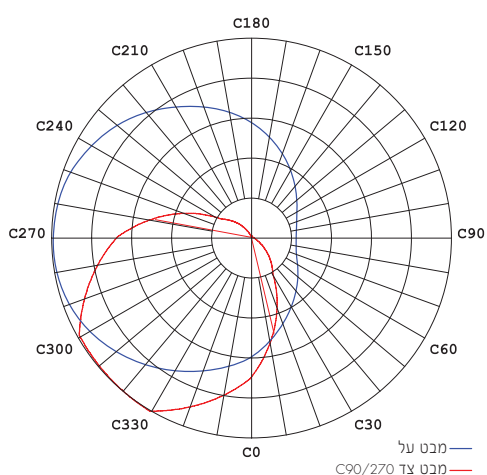

גוף תאורת לד צמוד קיר/חומה בדרגת אטימות IP65. עיצוב קלאסי, חיסכון בצריכת החשמל ובתחזוקה. אפשרות בחירת גוון האור על ידי מפסק בתוך קופסת החיבורים. התקנה ייחודית ונוחה במיוחד, ללא צורך בפתיחת הגוף. להארת היקפי מבנה, מרפסות, פרגולות, מבואות ועוד.

מק"ט - 71462110

דגם - 9648DIP DARK GRAY

קישור לדף מוצר ואביזרים נלווים באתר



2Years
Guarantee



VALUE


220-240V
50-60Hz



IP65

IK08

מתאים לדרגות
התקן הישראלי

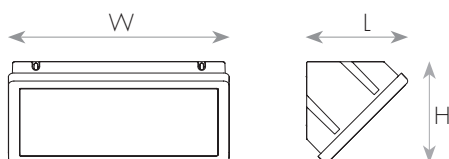

DIMENSIONS & WEIGHT

מידות ומשקל

Width	480mm
Length	203mm
Height	202mm
Product weight	1900g

MATERIALS & COLORS

מבנה וגימור

Product color	Granite gray
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	30/35/40W
Nominal current	0.14/0.16/0.18A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	FMS-40-350 N-SELV LD
Driver output current	200-350mA
Dimmable driver mode	No
Power factor	>0.95
THDi	<8%
Output ripple current	≤4%
Inrush current	20A
Inrush current time T_{h50}	50μs
Max. no. of lum. On circuit break. B10 A	26
Max. no. of lum. On circuit break. B16 A	42
Max. no. of lum. On circuit break. C10 A	26
Max. no. of lum. On circuit break. C16 A	42

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-10...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65
Protection class IK (shock resistance)	IK08

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
Driver lifespan	50000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	90Lm/W
Luminous flux	3600Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	SINOTRON
Chip type	SMD 2835
Beam angle	110°
Efficiency	100%