


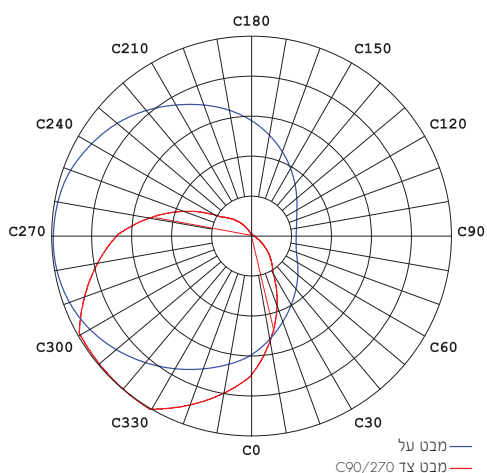

גוף תאורת לד צמוד קיר/חומה בדרגת אטימות IP65. עיצוב קלאסי, חיסכון בצריכת החשמל ובתחזוקה. אפשרות בחירת גוון האור על ידי מפסק בתוך קופסת החיבורים. דרייבר LIFUD ללא ריצוד. התקנה ייחודית ונוחה במיוחד, ללא צורך בפתיחת הגוף. להארת היקפי מבנה, מרפסות, פרגולות, מבואות ועוד.

מק"ט - 71462201

דגם - 9620X052D

קישור לדף מוצר ואביזרים נלווים באתר



5Years
Guarantee



PRO

220-240V
50-60Hz




IP65



IK08

מתאים לרשימת
התקן הישראלי

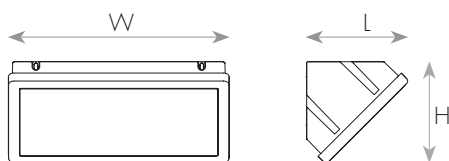

DIMENSIONS & WEIGHT

מידות ומשקל

Width	317mm
Length	145mm
Height	145mm
Product weight	870g

MATERIALS & COLORS

מבנה וגימור

Product color	Granite gray
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	21W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	LS-30-700 LI3
Driver output current	700mA
Dimmable driver mode	No
Power factor	>0.95
THDi	<5%
Output ripple current	≤3%
Inrush current	40A

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-10...+35°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
Binning	√ Declaration SDCM ≤ 5
IP 60529	IP65
Protection class IK (shock resistance)	IK08
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>51000Hrs
Driver lifespan	50000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	88Lm/W
Luminous flux	1750/1850/1900Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	SAMSUNG
Chip type	SMD 2835
SDCM	≤5
Beam angle	108°
Efficiency	100%