


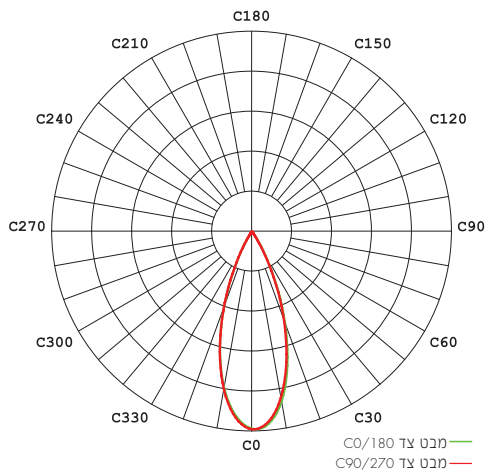

סדרת שקועי תקרה בעיצוב מדויק ושוליים דקים במיוחד. ספוט DARKLIGHT למניעת סנוור ולמיקוד קרני האור בזווית הארה 38°. גוון האור ניתן לבחירה - חם, ניטרלי או קר ומותאם לכל אווירה. מקדם מסירת צבע גבוה ביותר CRI>90 ודרייבר חיצוני ללא ריצוד. מתאים להנמכת גבס סטנדרטית. להארת מסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.

מק"ט - 71608003

דגם - Q-9620R

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee



VALUE

220-240V
50-60Hz




IP20

IP44

IK04

מתאים לרשימות
התקן הישראלי

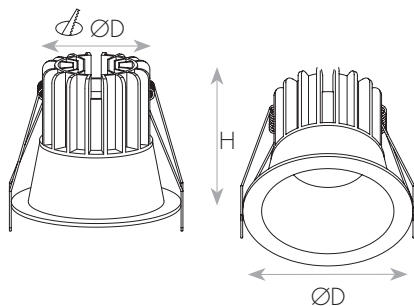

DIMENSIONS & WEIGHT

מידות ומשקל

Height	95mm
Diameter	101mm
Product weight	490g
Cut hole	90mm

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK04
Cover finishing	Clear
Cover material	glass



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	20W
Nominal current	0.17A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIR018YS0500H
Driver output current	500mA
Dimmable driver mode	No
Power factor	>0.53
Output ripple current	≤0.5%
Inrush current	20A
Inrush current time T _{h50}	100µs
Max. no. of lum. On circuit break. B10 A	30
Max. no. of lum. On circuit break. B16 A	48
Max. no. of lum. On circuit break. C10 A	30
Max. no. of lum. On circuit break. C16 A	48
Optional driver ON/OFF	LF 17900103 LDV 10025020
Optional driver 1-10V	LF 17900208
Optional driver DALI	LF 17900251 LF 17900252

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20/IP44
Ambient temperature range	-15...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CE	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20/IP44
Protection class IK (shock resistance)	IK04
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	65000Hrs
Driver lifespan	65000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	95Lm/W
Luminous flux	1900(4K)Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	SEMIB
Chip type	COB
Beam angle	38°
CIE class	Direct
Efficiency	100%