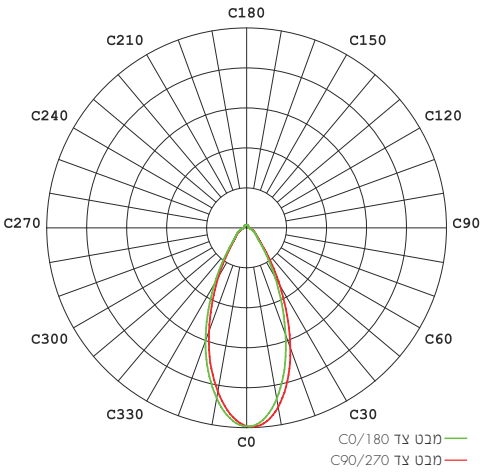
# שקוע תקרה לבן SOLY 5W 35mm 3CCT




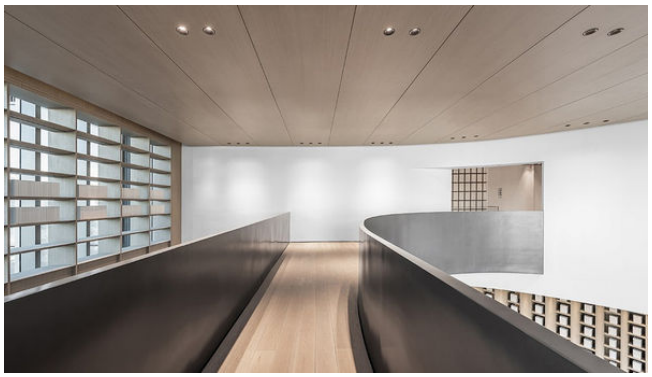
שקוע לד DARKLIGHT עם שוליים דקים במיוחד. ספוט קומפקטי בזווית מדויקת של 38° המונע סנוור ומאיר בצורה איכותית ומדויקת. תאורה אפקטיבית המשלבת איכות אורית גבוהה CRI>90, ומעניקה הארה טבעית. דרייבר חיצוני ללא ריצוד. מתאים למגוון רחב של יישומים, להארת מסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.

מק"ט - 71810045
דגם - 2905R Spot Light 5W CUT35 38D 3CCT WHITE
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי



## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Height | 58mm |
| Diameter | 40mm |
| Product weight | 595g |
| Cut hole diameter | 35mm |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | white |
| Body material | aluminum |
| Cover finishing | Clear |
| Cover material | PC |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 5.3W |
| Nominal current | 0.04A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | External LED driver |
| Driver manufacturer | LIFUD |
| Driver model | LF-008S0135H |
| Driver output current | 135mA |
| Power factor | >0.55 |
| THDi | <9% |
| Output ripple current | ≤5% |
| Inrush current | 15A |
| Inrush current time $T_{h50}$ | 60µs |
| Max. no. of lum. On circuit break. B10 A | 82 |
| Max. no. of lum. On circuit break. B16 A | 131 |
| Max. no. of lum. On circuit break. C10 A | 136 |
| Max. no. of lum. On circuit break. C16 A | 222 |
| Dimmable mode | No |
| Optional driver 1-10V | LF 17900216 |
| Optional driver TRIAC | LF 17900031 |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-2 |
| CE | IEC 60598-1<br>IEC 60598-2-2<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| IP 60529 | IP20 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Recessed |
| Mounting location | Ceiling |
| Type of protection | IP20 |
| Ambient temperature range | -10...+40°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |

## PHOTOMETRIC DATA

## אופטיקה

| | |
|---|---|
| Luminous efficacy | 113Lm/W |
| Luminous flux | 600(4K)Lm |
| CCT | 3000/4000/6000K |
| CRI | >90 |
| Beam angle | 38° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין