


גוף תאורה ליניארי בעילות אורית גבוהה 140Lm/w. זווית א-סימטרית לפיזור אור אופטימלית. כיסוי זכוכית מחוסמת. בחירת עוצמה (200, 150 או 100 וואט). דרגת אטימות IP65. פתרון הארה מושלם בגבהים של 4-15 מטרים במחסנים לוגיסטיים, מעברים, אולמות ספורט ושטחים פתוחים.

מק"ט - 74096020

דגם - RHBL3_200_40_20°X60°_D

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK09
- IP65
- CLASS1
- 100-277 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

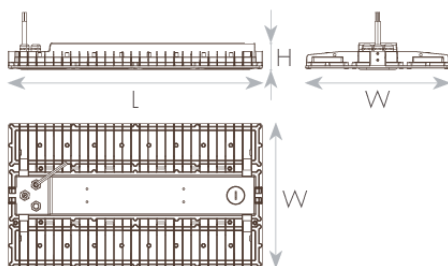

DIMENSIONS & WEIGHT

Width	269mm
Length	473mm
Height	49mm
Product weight	4080g

ELECTRICAL DATA

Nominal wattage	200W
Nominal current	0.89A
Nominal voltage	100-277V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	SOSEN
Driver model	SS-200NH V300A
Driver output current	1000mA
Dimmable driver mode	1-10V
Power factor	>0.98
THDi	<5%
Output ripple current	≤5%
Inrush current	80A
Inrush current time T_{H50}	500μs

MATERIALS & COLORS

Cable surface [mm ²]	gray
Protection class IEC 62262	aluminum
Cover finishing	IK09
Cover material	Clear
Lens material	Tempered glass

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=50°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
CE	IEC 60598-1 IEC 60598-2-1
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	✓ Ta=35°C
LM79	✓
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK09
Green Building	ISO 14001
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-30...+50°C
---------------------------	-------------

PERFORMANCE

Lifespan (Hr)	120000Hrs
---------------	-----------

TM21	√ Ta=35°C
------	-----------

Lifespan L70	>108000Hrs
--------------	------------

Lifespan L80	>1080000Hrs
--------------	-------------

Lifespan L90	>570000Hrs
--------------	------------

PHOTOMETRIC DATA

Luminous efficacy	150Lm/W
-------------------	---------

Luminous flux	29900Lm
---------------	---------

CCT	4000K
-----	-------

CRI	>80
-----	-----

LED manufacturer	TYF
------------------	-----

Chip type	SMD 3030
-----------	----------

Beam angle	60X20°
------------	--------

CIE class	Direct
-----------	--------

Efficiency	100%
------------	------
