
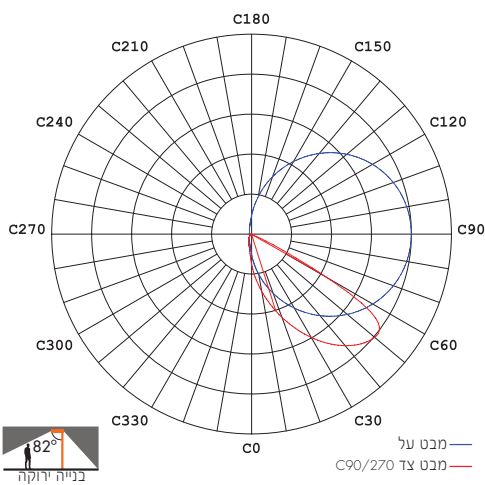


גוף שקוע חומה א-סימטרי מונע סנוור. פתרון מעוצב לתאורת חוץ ופנים בדרגת אטימות IP65. כולל קופסת ביטון מ-PC וברגי נירוסטה אל-חלד. להתקנה במעברים, חומות, כניסה לחניונים ועוד.

מק"ט - 74112230

דגם - GL13305

קישור לדף מוצר ואביזרים נלווים באתר

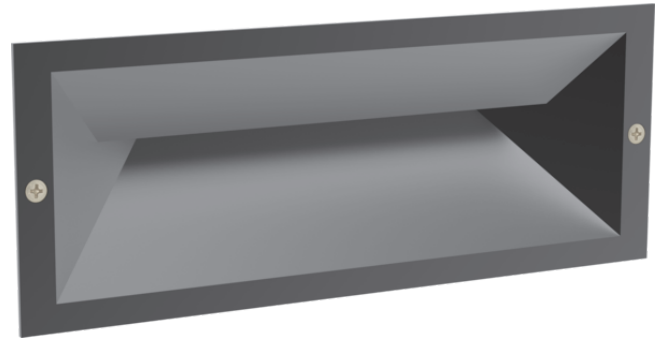

3Years Guarantee | VALUE | 220-240V 50-60Hz | IP65 | IK08 | מתאים לרשימת התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	250mm
Length	98mm
Height	90mm
Product weight	850g
Cut hole	85X96X248mm

MATERIALS & COLORS

מבנה וגימור

Product color	gray
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	13W
Nominal current	0.06A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	300mA
Dimmable driver mode	No
Power factor	>0.92
THDi	<13%
Inrush current	10A

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65
Protection class IK (shock resistance)	IK08
Green Building	√
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Recessed
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-25...+40°C

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
---------------	----------



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	19Lm/W
Luminous flux	250Lm
CCT	3000K
CRI	>80
LED manufacturer	OSRAM
Chip type	SMD 3030
Beam angle	75°
Efficiency	100%