
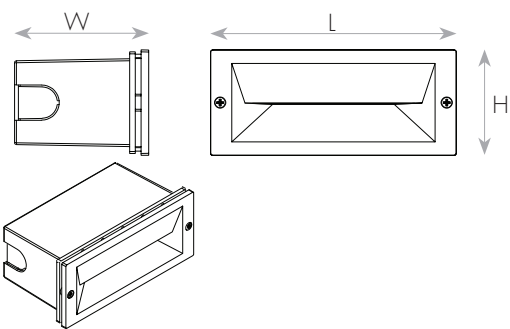
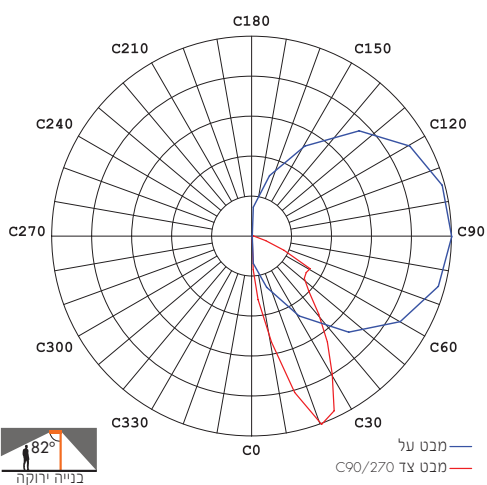


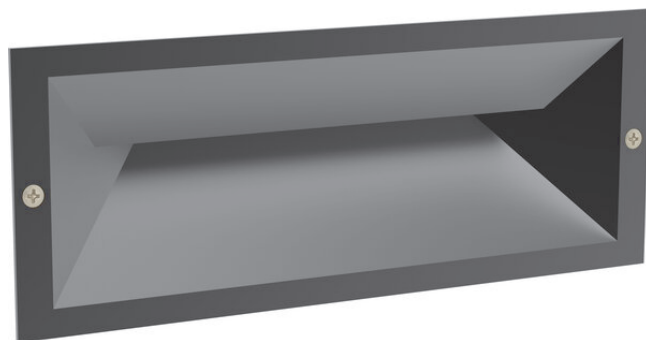

גוף שקוע חומה א-סימטרי מונע סנוור. פתרון מעוצב לתאורת חוץ ופנים בדרגת אטימות IP65. כולל קופסת ביטון מ-PC וברגי נירוסטה אל-חלד. להתקנה במעברים, חומות, כניסה לחניונים ועוד.

מק"ט - 74114250

דגם - GL13309

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee

220-240V
50-60Hz



IP65

IK08

מתאים לדרגות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	120mm
Length	55mm
Height	77mm
Product weight	220g
Cut hole	114X60X45mm

MATERIALS & COLORS

מבנה וגימור

Product color	gray
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	6.7W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No
Power factor	>0.75

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65
Protection class IK (shock resistance)	IK08
Green Building	√
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Recessed
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-25...+40°C

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
---------------	----------



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	4.5Lm/W
Luminous flux	30Lm
CCT	3000K
CRI	>80
LED manufacturer	OSRAM
Chip type	SMD 3030
Beam angle	120°
Efficiency	100%