
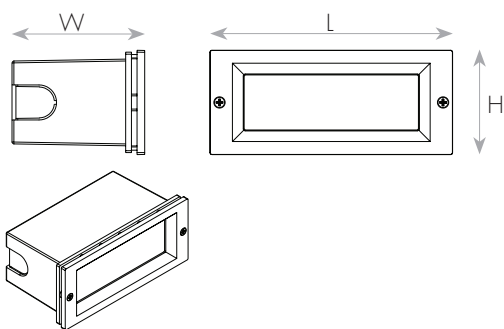
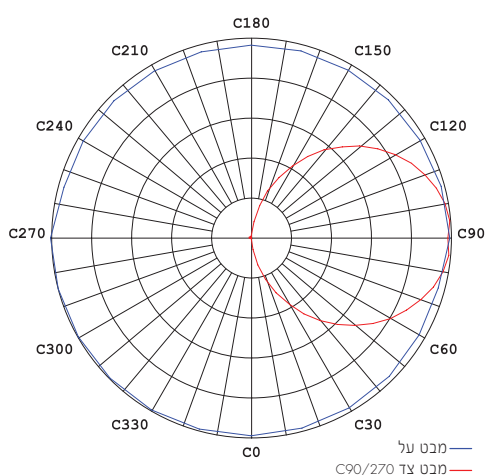


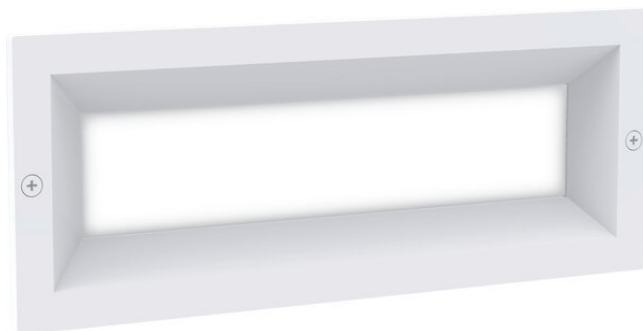

גוף שקוע חומה א-סימטרי מונע סנוור. פתרון מעוצב לתאורת חוץ ופנים בדרגת אטימות IP65. כולל קופסת ביטון מ-PC וברגי נירוסטה אל-חלד. להתקנה במעברים, חומות, כניסה לחניונים ועוד.

מק"ט - 74221273

דגם - GL13310

קישור לדף מוצר ואביזרים נלווים באתר



3Years Guarantee | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי



## DIMENSIONS & WEIGHT

## מידות ומשקל

|                |             |
|----------------|-------------|
| Width          | 120mm       |
| Length         | 55mm        |
| Height         | 77mm        |
| Product weight | 220g        |
| Cut hole       | 114X60X45mm |

## MATERIALS & COLORS

## מבנה וגימור

|                            |          |
|----------------------------|----------|
| Product color              | white    |
| Body material              | aluminum |
| Protection class IEC 62262 | IK08     |
| Cover finishing            | milky    |
| Cover material             | PC       |



ELECTRICAL DATA

נתונים חשמליים

|                      |                     |
|----------------------|---------------------|
| Nominal wattage      | 6.7W                |
| Nominal current      | 0.04A               |
| Nominal voltage      | 220-240V            |
| Mains frequency      | 50/60Hz             |
| Protection class     | Class 1             |
| Operating mode       | Internal LED driver |
| Driver manufacturer  | Integrated          |
| Dimmable driver mode | No                  |
| Power factor         | >0.75               |

CERTIFICATES & STANDARDS

תקנים

|                                        |                                                          |
|----------------------------------------|----------------------------------------------------------|
| Nisko Class                            | VALUE 3 Years                                            |
| Israeli Standard                       | Ta=40°C<br>IS 20-1<br>IS 20-2-2                          |
| CB                                     | IEC 60598-1<br>IEC 60598-2-2<br>IEC 62031<br>IEC 62493   |
| Photobiological Safety                 | IEC 62778 RG0 (Exempt)                                   |
| EMC                                    | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80                                   | √                                                        |
| IP 60529                               | IP65                                                     |
| Protection class IK (shock resistance) | IK08                                                     |
| ISO 9001                               | √                                                        |

APPLICATION & MOUNTING

יישומים

|                           |             |
|---------------------------|-------------|
| Application environment   | OUTDOOR     |
| Mounting type             | Recessed    |
| Mounting location         | Wall        |
| Type of protection        | IP65        |
| Ambient temperature range | -25...+40°C |

PERFORMANCE

ביצועים

|               |          |
|---------------|----------|
| Lifespan (Hr) | 50000Hrs |
|---------------|----------|

PHOTOMETRIC DATA

אופטיקה

|                   |          |
|-------------------|----------|
| Luminous efficacy | 27Lm/W   |
| Luminous flux     | 180Lm    |
| CCT               | 3000K    |
| CRI               | >80      |
| LED manufacturer  | OSRAM    |
| Chip type         | SMD 3030 |
| Beam angle        | 120°     |
| Efficiency        | 100%     |