
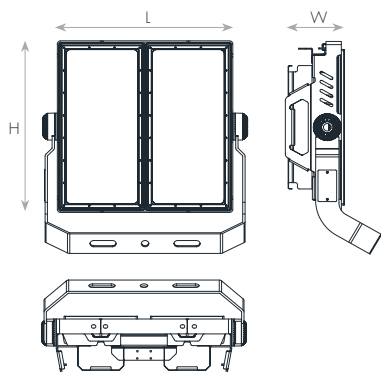


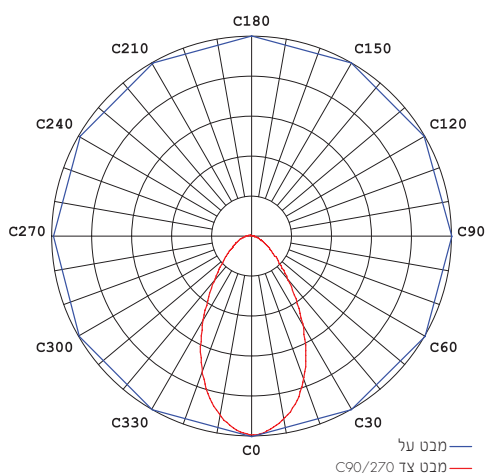

גופי תאורת הצפה מקצועיים הבנויים כמערכת מודולרית בהספקים של עד 700W ובדרגת אטימות IP65. יעילות אורית גבוהה של עד 150Lm/W. דרייבר מוגן מפני שמש או גשם. כולל מגן נחשולי מתח חיצוני 10KV להגנה מוגברת. להתקנה בגובה רב במגרשים וכשצ"פ.

מק"ט - 74648066

דגם - SL-F2-500W + bent forward bracket 6000K 60D

קישור לדף מוצר ואביזרים נלווים באתר



5Years
Guarantee




PRO

200-277V
50-60Hz



IP65

מתאים לדרשות
התקן הישראלי

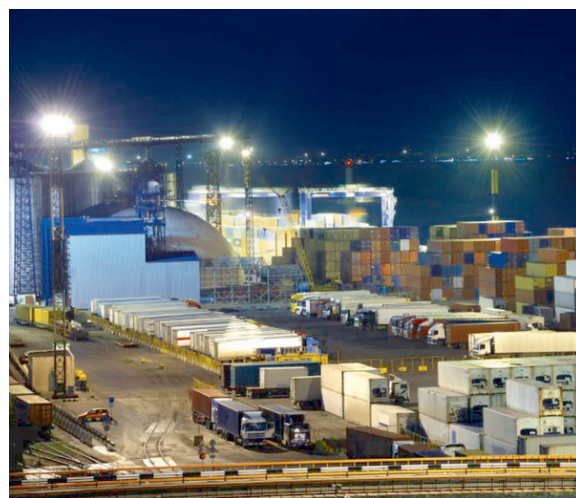

DIMENSIONS & WEIGHT

מידות ומשקל

Width	126mm
Length	439mm
Height	472mm
Product weight	14500g

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	aluminum
Cover finishing	Clear
Cover material	PC
Lens material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	460W
Nominal current	1.94A
Nominal voltage	200-277V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	SOSEN
Driver model	2 × SS-240VH-E56B
Driver output current	4300mA
Dimmable driver mode	1-10V
Power factor	>0.98
THDi	<8%
Output ripple current	≤5%
Inrush current	270A
Inrush current time T _{h50}	300μs

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-5
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface Pole
Mounting location	Ceiling/Wall-mounted Pole
Type of protection	IP65
Ambient temperature range	0...+45°C

PERFORMANCE

ביצועים

Lifespan (Hr)	90000Hrs
Driver lifespan	90000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	147Lm/W
Luminous flux	67400Lm
CCT	6000K
CRI	>70
LED manufacturer	LUMILEDS
Chip type	SMD 3030
Beam angle	60°
IES Classification	Type VS
Longitudinal Classification	Very Short
BUG Rating	B5-U4-G3
Efficiency	100%