
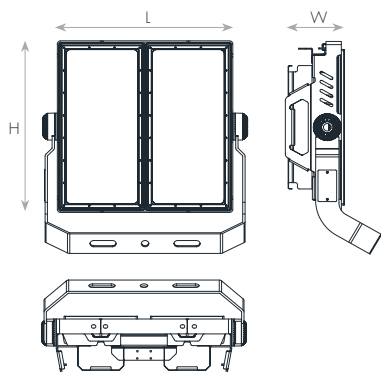


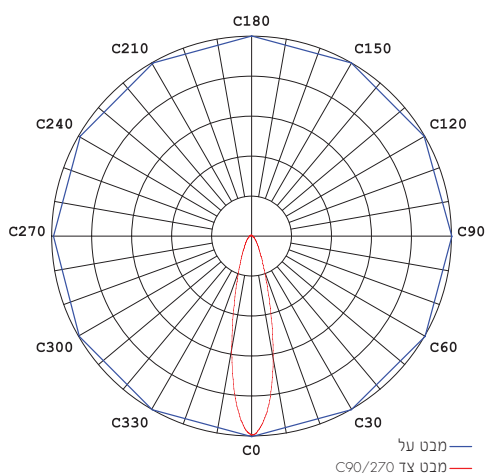

גופי תאורת הצפה מקצועיים הבנויים כמערכת מודולרית בהספקים של עד 700W ובדרגת אטימות IP65. יעילות אורית גבוהה של עד 150Lm/W. דרייבר מוגן מפני שמש או גשם. כולל מגן נחשולי מתח חיצוני 10KV להגנה מוגברת. להתקנה בגובה רב במגרשים וכשצ"פ.

מק"ט - 74670034

דגם - SL-F2-750W + bent forward bracket 4000K 30D

קישור לדף מוצר ואביזרים נלווים באתר



5Years  
Guarantee




PRO

200-277V  
50-60Hz



IP65

מתאים לדרשות  
התקן הישראלי

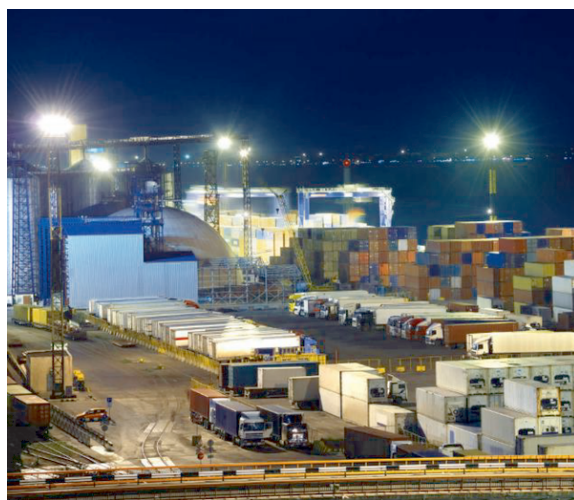

### DIMENSIONS & WEIGHT

### מידות ומשקל

|                |        |
|----------------|--------|
| Width          | 126mm  |
| Length         | 561mm  |
| Height         | 472mm  |
| Product weight | 22000g |

### MATERIALS & COLORS

### מבנה וגימור

|                 |          |
|-----------------|----------|
| Product color   | black    |
| Body material   | aluminum |
| Cover finishing | Clear    |
| Cover material  | PC       |
| Lens material   | PC       |

## ELECTRICAL DATA

## נתונים חשמליים

|                               |                     |
|-------------------------------|---------------------|
| Nominal wattage               | 670W                |
| Nominal current               | 1.25A               |
| Nominal voltage               | 200-277V            |
| Mains frequency               | 50/60Hz             |
| Protection class              | Class 1             |
| Operating mode                | Internal LED driver |
| Driver manufacturer           | SOSEN               |
| Driver model                  | 3 × SS-240VH-E56B   |
| Driver output current         | 4300mA              |
| Dimmable driver mode          | 1-10V               |
| Power factor                  | >0.98               |
| THDi                          | <8%                 |
| Output ripple current         | ≤5%                 |
| Inrush current                | 405A                |
| Inrush current time $T_{h50}$ | 300μs               |

## CERTIFICATES & STANDARDS

## תקנים

|                        |                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------|
| Nisko Class            | PROFESSIONAL 5 Years                                                                    |
| Israeli Standard       | Ta=45°C<br>IS 20-1<br>IS 20-2-5                                                         |
| CB                     | IEC 60598-1<br>IEC 60598-2-5<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG1                                                                           |
| EMC                    | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547                                |
| LM80                   | √                                                                                       |
| IP 60529               | IP65                                                                                    |
| ISO 9001               | √                                                                                       |

## APPLICATION & MOUNTING

## יישומים

|                           |                              |
|---------------------------|------------------------------|
| Application environment   | OUTDOOR                      |
| Mounting type             | Surface<br>Pole              |
| Mounting location         | Ceiling/Wall-mounted<br>Pole |
| Type of protection        | IP65                         |
| Ambient temperature range | 0...+45°C                    |

## PERFORMANCE

## ביצועים

|                 |           |
|-----------------|-----------|
| Lifespan (Hr)   | 120000Hrs |
| Driver lifespan | 120000Hrs |



PHOTOMETRIC DATA

אופטיקה

|                             |            |
|-----------------------------|------------|
| Luminous efficacy           | 161Lm/W    |
| Luminous flux               | 108050Lm   |
| CCT                         | 4000K      |
| CRI                         | >70        |
| LED manufacturer            | LUMILEDS   |
| Chip type                   | SMD 3030   |
| Beam angle                  | 30°        |
| IES Classification          | Type VS    |
| Longitudinal Classification | Very Short |
| BUG Rating                  | B5-U5-G3   |
| Efficiency                  | 100%       |