
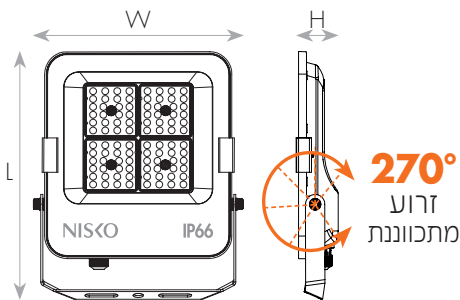


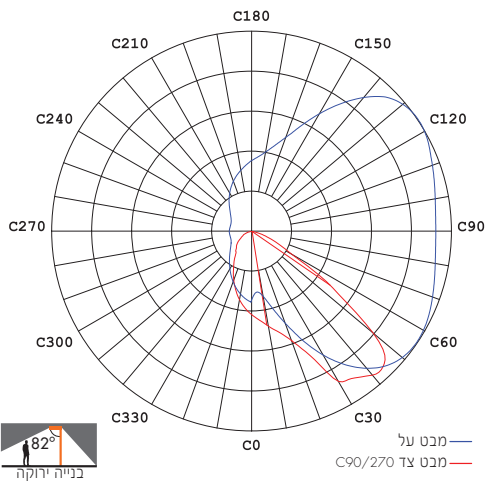

סדרת גופי תאורת הצפה לד מקצועיים בקו עיצוב נקי וביעילות אורית גבוהה 150Lm/W. אחידות אורית מיטבית. גופי התאורה כוללים מגן נחשולי מתח מובנה SPD, דרייבר איכותי של חברת SOSEN ולדים מתוצרת LUMILEDS. להתקנה כתאורת הצפה חיצונית במגרשי ספורט, שצ"פ, עמודי תאורה ועוד.

מק"ט - 74705040

דגם - EVB-RD-50W-A 40K 120X50D

קישור לדף מוצר ואביזרים נלווים באתר



5Years Guarantee | PRO | 100-277V 50-60Hz | IP66 | IK08 | מתאים לדרשות התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	435mm
Length	213mm
Height	252mm
Product weight	1000g

MATERIALS & COLORS

מבנה וגימור

Product color	gray
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	glass
Lens material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	47W
Nominal current	0.21A
Nominal voltage	100-277V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	SOSEN
Driver model	SS-60NL-E130B
Driver output current	600mA
Dimmable driver mode	No
Power factor	>0.96
THDi	<8%
Output ripple current	≤5%
Inrush current	15A
Inrush current time T _{h50}	50µs
Max. no. of lum. On circuit break. B10 A	25
Max. no. of lum. On circuit break. B16 A	40
Max. no. of lum. On circuit break. C10 A	25
Max. no. of lum. On circuit break. C16 A	40

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface Pole
Mounting location	Ceiling/Wall-mounted Pole
Type of protection	IP66
Ambient temperature range	0...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-5
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
Binning	√ Declaration SDCM ≤ 3
IP 60529	IP66
Protection class IK (shock resistance)	IK08
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	80000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>43000Hrs
Driver lifespan	80000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	130Lm/W
Luminous flux	6100Lm
CCT	4000K
CRI	>80
LED manufacturer	LUMILEDS
Chip type	SMD 2835
SDCM	≤3
Beam angle	120X50°
IES Classification	Type II
Longitudinal Classification	Very Short
BUG Rating	B2-U0-G1
Efficiency	100%