פנס הצפה אפור IP66 60° CONAN 400W
אור ניטרלי

סדרת גופי תאורת הצפה לד מקצועיים בקו עיצוב נקי וביעילות אורית גבוהה 150Lm/W. אחידות אורית מיטבית. גופי התאורה כוללים מגן נחשולי מתח מובנה -SPD, דרייבר איכותי של חברת SOSEN ולדים מתוצרת LUMILEDS. להתקנה כתאורת הצפה חיצונית במגרשי ספורט, שצ"פ, עמודי תאורה ועוד.

מק"ט - 74740041
דגם - EVB-RD-400W-A 40K 60D
קישור לדף מוצר ואביזרים נלווים באתר

5Years Guarantee | PRO | 100-277V 50-60Hz | IP66 | IK08 | מתאים לדרישות התקן הישראלי

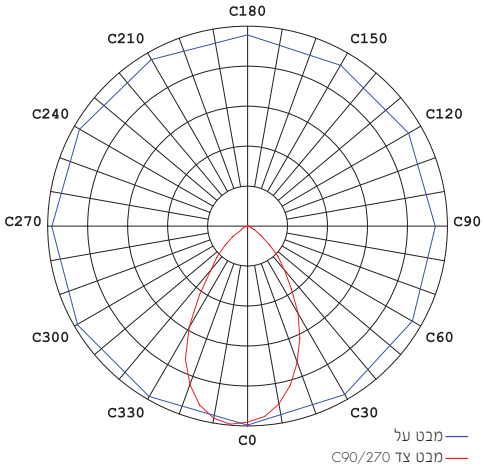

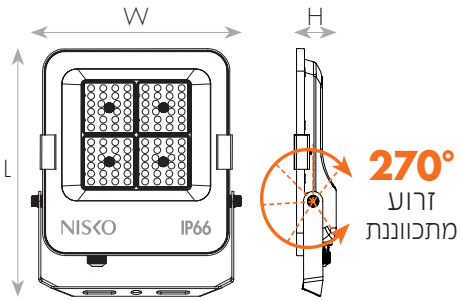

DIMENSIONS & WEIGHT — מידות ומשקל

Width	54mm
Length	48mm
Height	499mm
Product weight	6100g

MATERIALS & COLORS — מבנה וגימור

Product color	gray
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	glass
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	400W
Nominal current	1.69A
Nominal voltage	100-277V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	SOSEN
Driver model	2 × SS-200NL-E260B
Driver output current	1000mA
Dimmable driver mode	No
Power factor	>0.97
THDi	<10%
Output ripple current	≤5%
Inrush current	200A
Inrush current time T_{h50}	316µs
Max. no. of lum. On circuit break. B10 A	2
Max. no. of lum. On circuit break. B16 A	4
Max. no. of lum. On circuit break. C10 A	4
Max. no. of lum. On circuit break. C16 A	6

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-5
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
Binning	√ Declaration SDCM ≤ 3
IP 60529	IP66
Protection class IK (shock resistance)	IK08
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	OUTDOOR
Mounting type	Surface Pole
Mounting location	Ceiling/Wall-mounted Pole
Type of protection	IP66
Ambient temperature range	0...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	70000Hrs
TM21	√ Ta=35°C
Lifespan L70	>120000Hrs
Lifespan L80	>85000Hrs
Lifespan L90	>39000Hrs
Driver lifespan	70000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	149Lm/W
Luminous flux	59700Lm
CCT	4000K
CRI	>80
LED manufacturer	LUMILEDS
Chip type	SMD 3030
SDCM	≤3
Beam angle	60°
IES Classification	Type VS
Longitudinal Classification	Very Short
BUG Rating	B5-U4-G2
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ