

מנורת תלייה דקורטיבית מסדרת SPIKO. איכות אורית גבוהה  $CRI > 90$ , כיסוי אופטי של עדשת HONEYCOMB, עיצוב מודרני ומרהיב במגוון אורכים. מיוצרת מחומרים איכותיים וברמת גימור גבוהה. להארה בבתי מגורים, לובאים, אולמות אירועים, בתי מלון ועוד.

מק"ט - 75410631

דגם - UNI-ICBM-013-4-BS-3K

קישור לדף מוצר ואביזרים נלווים באתר




3 YEAR GUARANTEE

220-240V  
50-60Hz



IP20

מתאים לרשימת התקן הישראלי

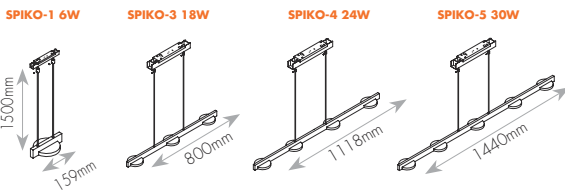

#### DIMENSIONS & WEIGHT

#### מידות ומשקל

Width	108mm
Length	1093mm
Height	40mm
Product weight	1770g

#### MATERIALS & COLORS

#### מבנה וגימור

Product color	Black Silver
Body material	aluminum
Cover finishing	milky

## ELECTRICAL DATA

## נתונים חשמליים

Cable length	1.5
Nominal wattage	24W
Nominal current	0.11A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	LS-40-950 LI EXC
Driver output current	950mA
Dimmable driver mode	No
Power factor	>0.95
THDi	<10%
Output ripple current	≤5%
Inrush current	24.9A
Inrush current time $T_{h50}$	142μs
Max. no. of lum. On circuit break. B10 A	23
Max. no. of lum. On circuit break. B16 A	37
Max. no. of lum. On circuit break. C10 A	36
Max. no. of lum. On circuit break. C16 A	58

## APPLICATION & MOUNTING

## יישומים

Application environment	Indoor
Mounting type	Suspension
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	0...+35°C

## CERTIFICATES & STANDARDS

## תקנים

Nisko Class	ECO 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	√

## PERFORMANCE

## ביצועים

Lifespan (Hr)	100000Hrs
Driver lifespan	100000Hrs

## PHOTOMETRIC DATA

## אופטיקה

Luminous efficacy	50Lm/W
Luminous flux	1200Lm
CCT	3000K
CRI	>90
LED manufacturer	OSRAM
Chip type	SMD 2835
Beam angle	80°
CIE class	Direct
Efficiency	100%