


צמודי קיר UP&DOWN בעיצוב אלגנטי לתאורת חוץ תוצרת SYLVANIA העולמית. הארה מיטבית בשני כיוונים - כלפי מעלה וכלפי מטה. חוזק מכני IK08 ודרגת אטימות IP65. יעילות אורית גבוהה, להבטחת חיסכון בצריכת חשמל. להארת היקפי מבנה, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 75512003

דגם - ZB703FSD

קישור לדף מוצר ואביזרים נלווים באתר

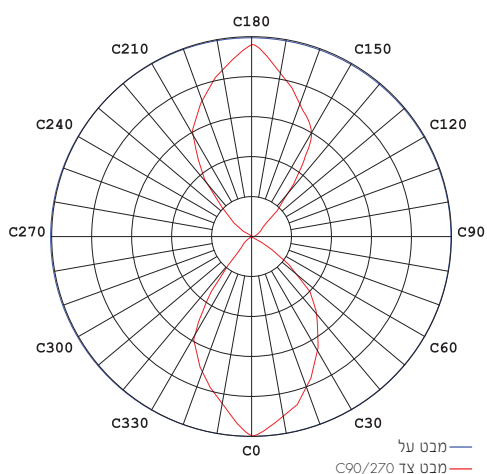

5Years Guarantee | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרשות התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Width	131mm
Height	175mm
Diameter	110mm
Product weight	1800g

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	18W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	EBP018C0450CHP
Driver output current	450mA
Dimmable driver mode	No
Power factor	>0.90
Inrush current	10A

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-30...+35°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK (shock resistance)	IK08
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	54000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>54000Hrs
Driver lifespan	43800Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	75Lm/W
Luminous flux	1350Lm
CCT	3000K
CRI	>80
LED manufacturer	CREE
Chip type	COB
Beam angle	80°
Efficiency	100%