




בולרדים מקצועיים ודקורטיביים. דרגת אטימות גבוהה IP66, יעילות אורית מיטבית ואופטיקה מעולה להבטחת חיסכון בצריכת חשמל. התקנה קלה ומהירה, כולל קופסת חיבורים אטומה. ניתן לקבל גירסה עם דרייבר DALI. להארת שטחים פתוחים, שבילים, גינות, גנים ציבוריים, מבואות, מבנים, טיילות ועוד.


מק"ט - 75600304

LT-BL-24W 60CM 3000K BLACK - דגם

קישור לדף מוצר ואביזרים נלווים באתר

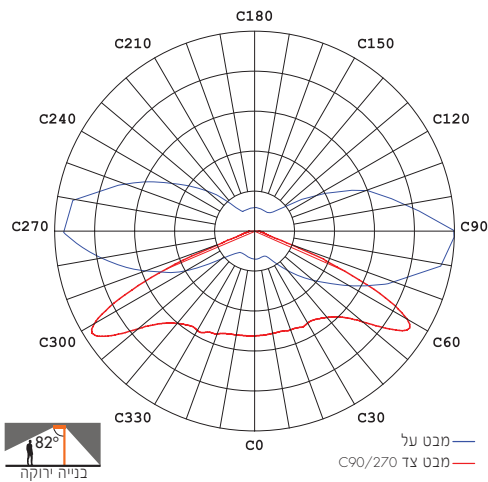

5Years Guarantee | PRO | 220-240V 50-60Hz | IP66 | IK08 | מתאים לדרשות התקן הישראלי

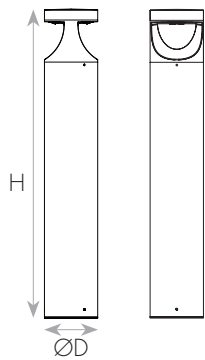

DIMENSIONS & WEIGHT

מידות ומשקל

Height	600mm
Diameter	152mm
Product weight	3830g

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	PC
Lens material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	24W
Nominal current	0.11A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	TRIDONIC
Driver model	LC 14/250-350/40 flexC R ADV2
Driver output current	600mA
Dimmable driver mode	No
Power factor	>0.97
THDi	<14%
Output ripple current	≤5%
Inrush current	15A
Inrush current time T_{h50}	183μs
Max. no. of lum. On circuit break. B10 A	24
Max. no. of lum. On circuit break. B16 A	38
Max. no. of lum. On circuit break. C10 A	40
Max. no. of lum. On circuit break. C16 A	63

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	External
Mounting location	Ground
Type of protection	IP66
Ambient temperature range	-20...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
LM79	√
IP 60529	IP66
Protection class IK (shock resistance)	IK08
Green Building	√
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
Driver lifespan	50000Hrs



PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	98Lm/W
Luminous flux	2350Lm
CCT	3000K
CRI	>80
LED manufacturer	Bridgelux
Chip type	SMD 5050
Beam angle	180°
Efficiency	100%