


סדרת גופי תאורה צילינדר במבנה אלומיניום איכותי בעיצוב נקי ועדין. בדרגת אטימות IP65 ויעילות אורית גבוהה להבטחת חיסכון בצריכת חשמל. להתקנה בבתי מגורים, גלריות, בתי מלון, חנויות, מסעדות, מעברים ועוד.

מק"ט - 75610002

דגם - A-12W 44D40K IP65 WH-1733

קישור לדף מוצר ואביזרים נלווים באתר

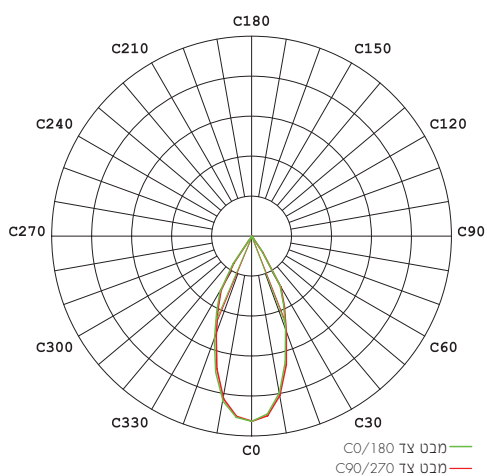

3Years
Guarantee



VALUE

220-240V
50-60Hz



IP65

מתאים לדרשות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Height	137mm
Diameter	90mm
Product weight	650g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	Clear
Cover material	glass



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	12W
Nominal current	0.07A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	500mA
Dimmable driver mode	No
Power factor	>0.76

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
Green Building	√
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE

ביצועים

Lifespan (Hr)	30000Hrs
---------------	----------

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	75Lm/W
Luminous flux	900Lm
CCT	4000K
CRI	>80
LED manufacturer	CREE
Chip type	COB
Beam angle	44°
CIE class	Direct
Efficiency	100%