


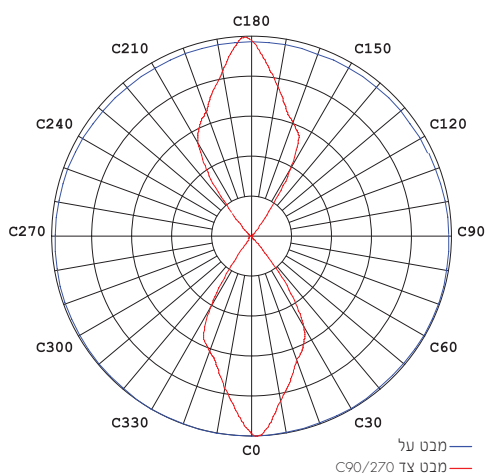

צמודי קיר לד UP&DOWN בעיצוב אלגנטי לתאורת חוץ. גופים דקורטיביים שיוצרים פיזור אור מחמיא על אלמנטים. יעילות אורית גבוהה להבטחת חיסכון בצריכת חשמל. דרגת אטימות IP65. להארת היקפי מבנה, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 76000025

דגם - UP-WL28-27W 60D 40K IP65 WH

קישור לדף מוצר ואביזרים נלווים באתר



5Years
Guarantee





PRO

220-240V
50-60Hz



IP65

מתאים לדרשות
התקן הישראלי

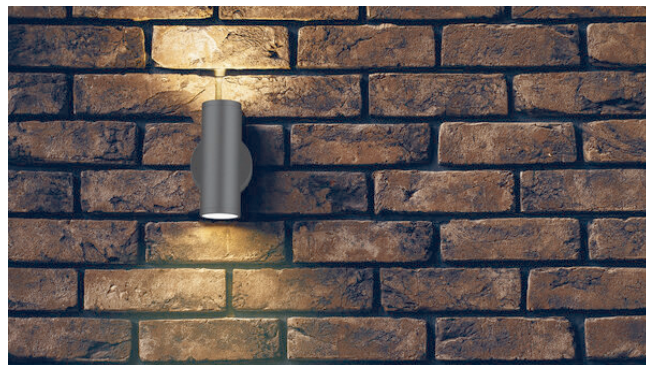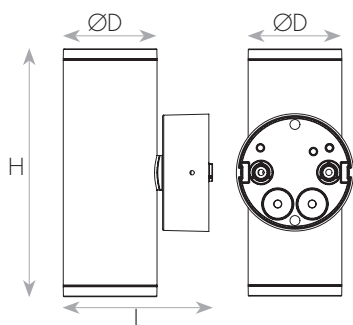

DIMENSIONS & WEIGHT

מידות ומשקל

Width	145mm
Length	230mm
Diameter	100mm
Product weight	1200g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	Clear
Lens material	PC

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	25W
Nominal current	0.11A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	NISKO
Driver model	WL28-I27W650-NF
Driver output current	650mA
Dimmable driver mode	No
Power factor	>0.96
THDi	<16%

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
IP 60529	IP65
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>55000Hrs
Lifespan L80	>55000Hrs
Lifespan L90	>55000Hrs



PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	122Lm/W
Luminous flux	3050Lm
CCT	4000K
CRI	>80
LED manufacturer	Bridgelux
Chip type	COB
Beam angle	60°
Efficiency	100%