


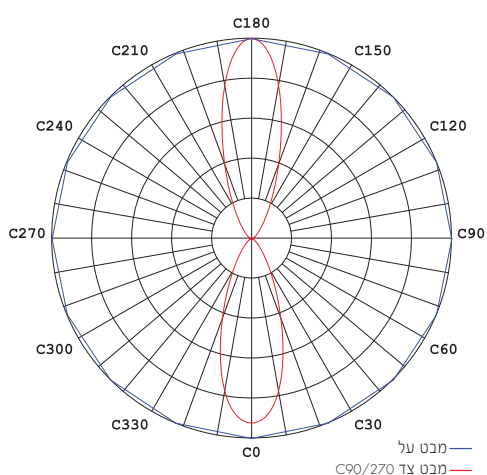

תאורת חוץ בעיצוב מעודן לאווירה נעימה. צמודי הקיר עשויים יציקת אלומיניום בגימור שחור ובדרגת אטימות IP65. התקנה נוחה וקלה. להתקנה בהיקפי מבנה, משטחים אנכיים, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 76000081

דגם - WL75-10W-C3

קישור לדף מוצר ואביזרים נלווים באתר



5Years
Guarantee



PRO


220-240V
50-60Hz



IP65

IK10

מתאים לדרשות
התקן הישראלי

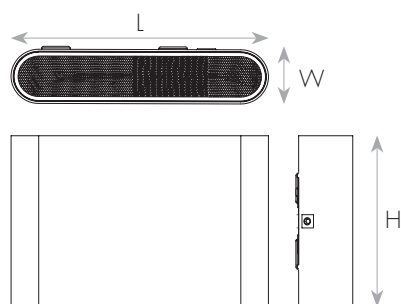

DIMENSIONS & WEIGHT

מידות ומשקל

Width	90mm
Length	175mm
Height	30.5mm
Product weight	570g

MATERIALS & COLORS

מבנה וגימור

Product color	Black Matt RAL 9005
Body material	aluminum
Protection class IEC 62262	IK10
Cover finishing	Frosted
Cover material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	9.2W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	275mA
Dimmable driver mode	No
Power factor	>0.92
THDi	<15%
Output ripple current	≤0.5%

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
Flicker IEEE 1789	√
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK (shock resistance)	IK10
Green Building	√
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	OUTDOOR
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+45°C

PERFORMANCE

ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>52000Hrs



PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	109Lm/W
Luminous flux	1000(3K)Lm
CCT	3000/4000/5700K
CRI	>80
LED manufacturer	Hongli Zhihui
Chip type	SMD 2835
Beam angle	29X77°
Efficiency	100%