





צמודי קיר/תקרה מקצועיים ודקורטיביים בדרגת אטימות גבוהה IP65. גוף אנטי-וונדלי עשוי פוליקרבונט בדרגת חוזק מכני IK08 ובסיס בכיסוי PC. להארה בשבילים, חומות, מעברים, חדרי מדרגות, חדרי שירות ועוד.

מק"ט - 76283012

דגם - YY-BL19-230-SH

קישור לדף מוצר ואביזרים נלווים באתר

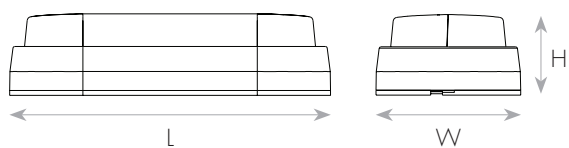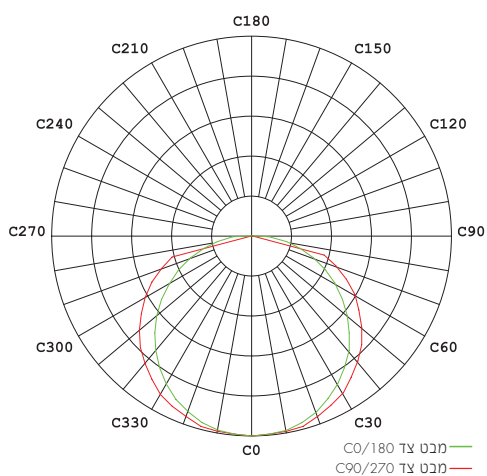

DIMENSIONS & WEIGHT

מידות ומשקל

Width	105mm
Length	230mm
Height	58.5mm
Product weight	378g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	12W
Nominal current	0.06A
Nominal voltage	170-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver model	YY-JBD-12W-V0.2
Driver output current	160mA
Dimmable driver mode	No
Power factor	>0.92
THDi	<27%

CERTIFICATES & STANDARDS

תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
LM80	√
IP 60529	IP65
Protection class IK (shock resistance)	IK08
ISO 9001	√
אישורים נוספים	פיקוד העורף √ מבחן הרס ת"י 5103-4 √

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE

ביצועים

Lifespan (Hr)	36000Hrs
---------------	----------



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	67Lm/W
Luminous flux	800Lm
CCT	3000K
CRI	>85
LED manufacturer	DACOL
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%