


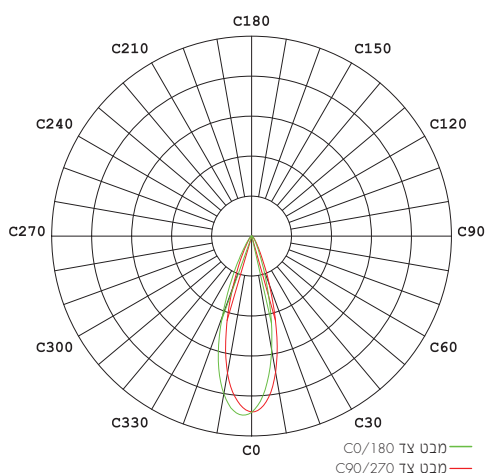

סדרת ספוטס מתכווננים למערכת פסי צבירה חד פאזי אוניברסלי בעיצוב קלאסי ונקי. תאורה מדויקת, טבעית ואיכותית, מקדם מסירת צבע גבוה $CRI > 90$ וללא ריצוד. נצילות אורית גבוהה המחמיאה לאובייקטים ולפריטי תצוגות. מאפשרים גמישות גבוהה להתאמת מיקום הספוטס. להתקנה בבתים, מוזיאונים, משרדים, חנויות, חלונות ראווה ועוד.

מק"ט - 77440830

דגם - FT1025

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee



VALUE


220-240V
50-60Hz



IP20



מתאים לדרשות
התקן הישראלי



DIMENSIONS & WEIGHT

מידות ומשקל

Height	75mm
Diameter	60mm
Product weight	310g

MATERIALS & COLORS

מבנה וגימור

Product color	black
Body material	aluminum
Cover finishing	Clear
Cover material	glass
Lens material	PC



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	8.3W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	TRIDONIC
Driver model	LC 14W 350mA fixC R ADV
Driver output current	350mA
Dimmable driver mode	No
Power factor	>0.93
THDi	<8%
Output ripple current	≤5%
Inrush current	9A
Inrush current time T _{h50}	180μs
Max. no. of lum. On circuit break. B10 A	47
Max. no. of lum. On circuit break. B16 A	75
Max. no. of lum. On circuit break. C10 A	93
Max. no. of lum. On circuit break. C16 A	149

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Trackline
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-25...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 62031
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	√

PERFORMANCE

ביצועים

Driver lifespan	50000Hrs
-----------------	----------



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	78Lm/W
Luminous flux	650Lm
CCT	3000K
CRI	>90
LED manufacturer	SANAN
Chip type	COB
Beam angle	36°
CIE class	Direct
Efficiency	100%