


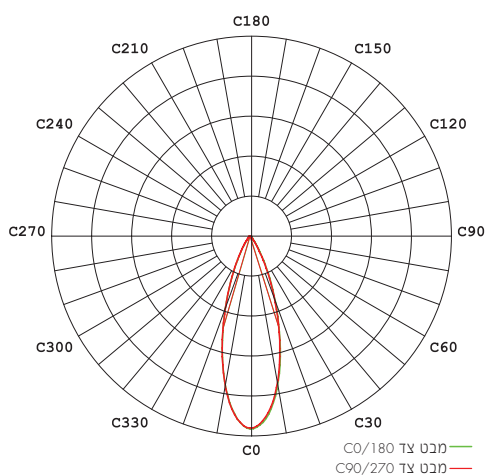

סדרת ספוטס מתכוננים למערכת פסי צבירה חד פאזי אוניברסלי בעיצוב קלאסי ונקי. תאורה מדויקת, טבעית ואיכותית, מקדם מסירת צבע גבוה $CRI > 90$ וללא ריצוד. נצילות אורית גבוהה המחמיאה לאובייקטים ולפריטי תצוגות. מאפשרים גמישות גבוהה להתאמת מיקום הספוטס. להתקנה בבתים, מוזיאונים, משרדים, חנויות, חלונות ראווה ועוד.

מק"ט - 77470840

דגם - FT1079W

קישור לדף מוצר ואביזרים נלווים באתר



3Years
Guarantee



VALUE


220-240V
50-60Hz



IP20



מתאים לדרשות
התקן הישראלי

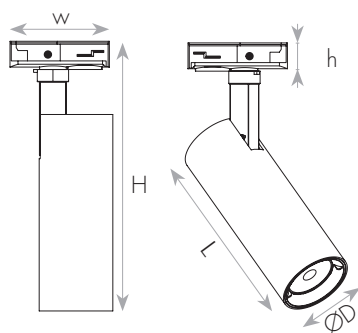

DIMENSIONS & WEIGHT

מידות ומשקל

Height	160mm
Diameter	60mm
Product weight	820g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	Clear
Cover material	PC
Lens material	PMMA

ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	17W
Nominal current	0.08A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver manufacturer	BDL-TECH
Driver model	BD-NB17CA-4040
Driver output current	400mA
Dimmable driver mode	No
Power factor	>0.97
THDi	<8%
Inrush current	6.4A
Inrush current time T_{h50}	30.1μs
Max. no. of lum. On circuit break. B10 A	169
Max. no. of lum. On circuit break. B16 A	108
Max. no. of lum. On circuit break. C10 A	203
Max. no. of lum. On circuit break. C16 A	130

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Trackline
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-20...+40°C

CERTIFICATES & STANDARDS

תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CE	IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20
ISO 9001	√

PERFORMANCE

ביצועים

Lifespan (Hr)	90000Hrs
Driver lifespan	100000Hrs



PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	82Lm/W
Luminous flux	1400Lm
CCT	4000K
CRI	>90
LED manufacturer	GOYM
Chip type	COB
Beam angle	38°
CIE class	Direct
Efficiency	100%