



סדרת גופים צמודי תקרה עם כיסוי וטבעת אקרילית מחומר עמיד ויחודי. עדשה חלבית עם אפקט מנצנץ שמספקת אחידות ותפוקה אורית גבוהה. חסכונית בחשמל ונוחה להתקנה. להארה בחדרי מגורים ואירוח, מטבחים, מבואות, תאורה כללית ועוד.

מק"ט - 17000162

דגם - DAISY 60W

קישור לדף מוצר ואביזרים נלווים באתר




2Years
Guarantee

220-240V
50-60Hz



IP20

מתאים לדרשות
התקן הישראלי

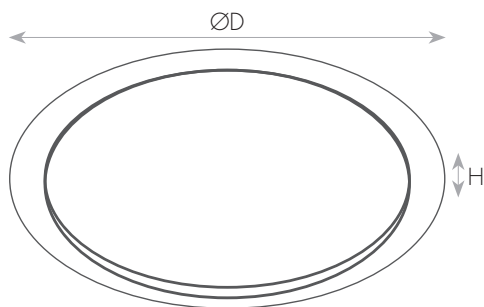

DIMENSIONS & WEIGHT

מידות ומשקל

Height	75mm
Diameter	565mm
Product weight	1700g

MATERIALS & COLORS

מבנה וגימור

Product color	white
Body material	PMMA
Cover finishing	milky
Cover material	PMMA



ELECTRICAL DATA

נתונים חשמליים

Nominal wattage	60W
Nominal current	0.28A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	400mA
Dimmable driver mode	No
Power factor	0.98
THDi	<12%

CERTIFICATES & STANDARDS

תקנים

Nisko Class	ECO 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING

יישומים

Application environment	INDOOR
Mounting type	Surface
Mounting location	Ceiling/Wall-mounted
Type of protection	IP20
Ambient temperature range	-10...+40°C

PERFORMANCE

ביצועים

Lifespan (Hr)	25000Hrs
---------------	----------

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	75Lm/W
Luminous flux	4500Lm
CCT	4000K
CRI	>82
LED manufacturer	BMTC
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%