




מנורת קיר דקורטיבית מסדרת BILUX בעיצוב מודרני ובדרגת אטימות IP54. הארה בשני כיוונים - כלפי מעלה ומטה. מיוצרת מחומרים איכותיים וברמת גימור גבוהה. איכות אורית גבוהה -  $CRI > 90$ . מגיעה בצבעי שחור, לבן וצהוב. להארה בבתי מגורים, לובאים, אולמות אירועים, בתי מלון ועוד.

מק"ט - 75410718

דגם - UNI-PICC-100-G-230-IP

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP54
- CLASS1
- 220-240 וולט 50-60 הרץ
- 3 שנות אחריות

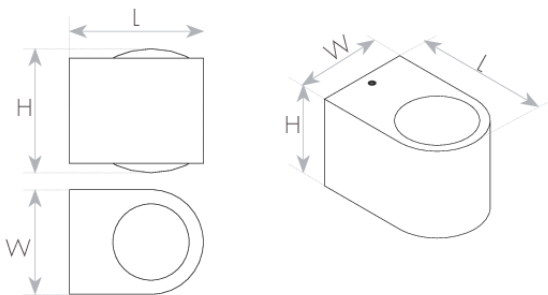

## DIMENSIONS & WEIGHT

Width	50mm
Length	64mm
Height	59mm
Product weight	320g

## ELECTRICAL DATA

Nominal wattage	2X2.5W
Nominal current	0.02A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable driver mode	No

## APPLICATION & MOUNTING

Ambient temperature range	0...+35°C
---------------------------	-----------

## MATERIALS & COLORS

Cable surface [mm <sup>2</sup> ]	gold
Protection class IEC 62262	aluminum
Cover material	Clear

## CERTIFICATES & STANDARDS

Nisko Class	ECO 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
ISO 9001	✓

## PERFORMANCE

Lifespan (Hr)	30000Hrs
---------------	----------

# PHOTOMETRIC DATA

Luminous efficacy	92Lm/W
Luminous flux	460Lm
CCT	3000K
CRI	>90
Beam angle	90°
Efficiency	100%